


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Jacob C. Cooper  
Contract No. 379  
July 14, 1881  
40.00 CH

Set a post 3½ ft. long, 3 ins. sq., 1½ ft. in the ground marked ¼s on North and South faces from which  
A fir 12 in. dia. bears N 70° E, 39 Lks marked ¼s BT.  
A fir 4 in. dia. bears S 50° W, 15 Lks marked ¼s BT

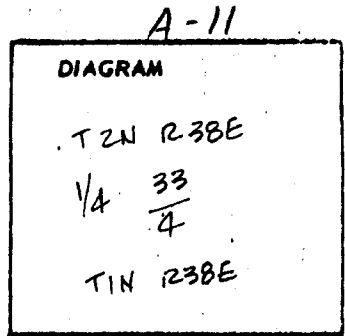

Description of corner evidence found:

Fir 25" N 82° E, 25.70 ft., good condition, Blazes closed (GLO Fir 12" N 70° E, 39 Lks,)

Fir 8" S 50° W, 15 Lks, Found dead and down with usable scribing.


Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set 2½" x 30" iron pipe 20" in the ground with a Brass Cap, marked as shown from which I scribe BT's.

Fir 14" S 22° W, 26.50 ft., scribed ¼s BT  
Painted blazes and placed BT and Attn. sign and red band on above found BT.

I nailed a brass washer marked OPLS 1097 to BT blazes.  
I set a steel fence post 5 ft. North with signs 54-4.

I painted a red band around BT's and face of scribe.  
I used a steel tape and compass with 19° declination and measured a horizontal distance to the center of the BT's.  
This corner was set 8/13/80, witness by Patrick Murphy.  
See map of survey.

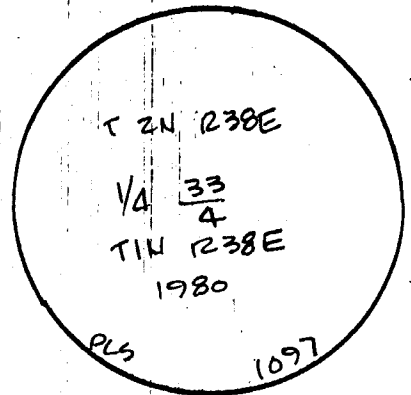

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James H. Buisman*

OREGON  
JULY 22, 1977  
JAMES H. BUISMAN  
1097

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the ..... day of.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY  
SURVEYOR

Received \_\_\_\_\_  
Date Filed \_\_\_\_\_  
By \_\_\_\_\_ GPO 796-333  
File No. 7-84 R