


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

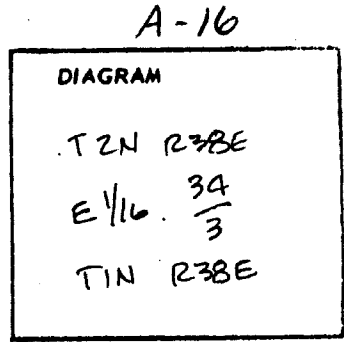

Description of corner evidence found:


N/A

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" iron pipe 6" in the ground, raised 2 1/2 ft. rock mound, with a Brass Cap marked as shown, from which I scribe BT's:

Pine 12" N 11°55' E, 60.60 ft., scribed T 2 N, R 38 E,  
E 1/16, S 34 BT.  
Fir 12" S 80°26' W, 120.60 ft., scribed T 1 N, R 38 E,  
E 1/16, S 3 BT.

I nailed a brass washer marked OPLS 1097 to BT blazers.  
I set a steel fence post 2 ft. South with signs 54-4 & 54-2.  
I painted a red band around BT's and face of scribe.  
I used a steel tape and WILD T16 and measured a horizontal distance to the center of the BT's.  
This corner was set 8/13/80, witness by Patrick Murphy.  
See map of survey.

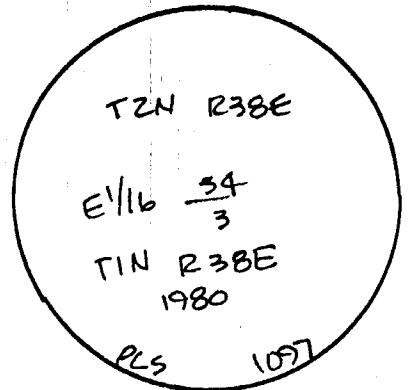

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*James H. Buisman*

OREGON  
JULY 22, 1977  
**JAMES H. BUISMAN**  
1097

Office of ..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the ..... day of.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**

---

Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 12-84 R