


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

John W. Kimbrill, Contract No. 579
Dated June 22, 1891
36.14 CH, set a post 3 ft. long, 3" sq.,
24" in the ground marked $\frac{1}{4}$'s on W face from
which a Fir 14" in dia. bears N 17° W, 8 Lks
marked $\frac{1}{4}$'s BT; A Fir 8" in dia. bears N 78° E,
24" marked $\frac{1}{4}$'s BT.

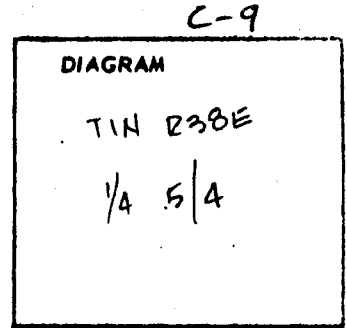

Description of corner evidence found:

None Found.


Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 $\frac{1}{2}$ " x 30" iron pipe, 28" in the ground with a Brass Cap, marked as shown, from which I scribed BT's:

Fir 8" S 88° 54' E, 43.20 ft., Scribed W $\frac{1}{4}$ S 4 BT.

Fir 9" N 24° 54' E, 43.00 ft., Scribed W $\frac{1}{4}$ S 4 BT.

I nailed a brass washer marked OPLS 1097 to BT blazers.
I set a steel fence post 3 ft. North with signs 54-4.
I painted a red band around BT's and face of scribe.
I used a steel tape and WILD T16 and measured a horizontal distance to the center of the BT's.
This corner was set 8/20/80, witness by Patrick Murphy.
See map of survey.

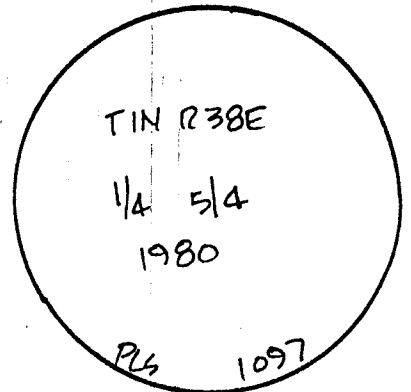

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

James H. Buisman

**OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097**

Office of County of
State of , I hereby certify that the within instrument was filed in this office
for record on the day of
..... by
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Received _____

Date Filed 9-20-79 796-333

By _____

File No. 23-84 R