


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

D-11

History of original corner establishment:

Corner not previously established.

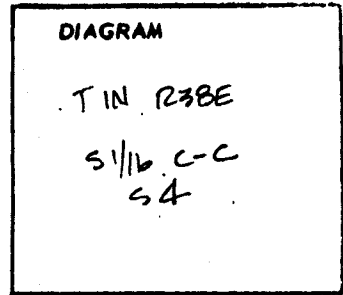

Description of corner evidence found:

N/A

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" iron pipe, 28" in the ground with a Brass Cap, marked as shown, from which I scribe BT's.


Fir 14" S 82°34' E, 24.00 ft., scribed CS 1/16 S 4 BT

Fir 15" S 08°21' W, 21.00 ft., scribed CS 1/16 S 4 BT.

I nailed a brass washer marked OPLS 1097 to BT blazers. I set a steel fence post 5 ft. West and 5 ft. South, with signs 54-2 and 54-4 & 54-2.

I painted a red band around BT's and face of scribe. I used a steel tape and WILD T16 and measured a horizontal distance to the center of the BT's.

This corner was set 8/18/80, witness by Patrick Murphy. See map of survey.

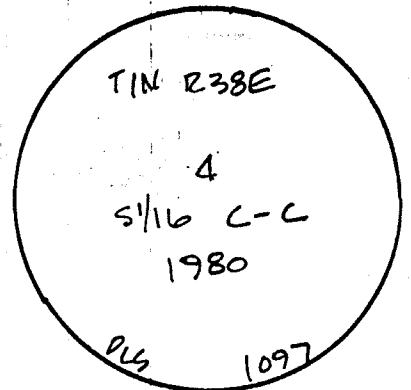

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Buisman

**OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097**

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR

To Received _____

Date Filed _____

By _____

File No. 30-84 R

GPO 796-333