

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


E-17

History of original corner establishment:

John W. Kimbrell
 Contract No. 579
 June 22, 1891
 Page 74

Found decayed post from Gray survey, Contract No. 120
 Set post 4 ft. long, 4 ins. sq., 24 ins. in ground
 Marked T 1 N, S 2 on the N.E., R 38 E, S 11 on the S.E.,
 S 10 on the S.W., S 3 on the N.W., 5 notches on the South
 and 2 notches on the East from which:

- A red fir 10" Ø bears N 50° E 19 Lks. marked T 1 N, R 38 E, S 2 BT
- A red fir 6" Ø bears N 20° W 30 Lks. marked T 1 N, R 38 E, S 3 BT
- A red fir 9" Ø bears S 60° W 38 Lks. marked T 1 N, R 38 E, S 10 BT
- A red fir 5" Ø bears S 55° E 8 Lks. marked T 1 N, R 38 E, S 11 BT

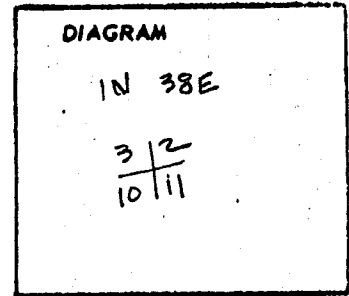

Description of corner evidence found:


None Found

Description of monument and accessories established to perpetuate the original location of this corner

At the position described above I set a 2½" x 30" iron pipe 25" in the ground with a Brass Cap, marked as shown, from which I scribe BT's.

- Fir 8" N 62°03' E, 17.70 ft., scribed T 1 N, R 38 E, S 2 BT
- Fir 9" S 53°00' E, 11.90 ft., scribed T 1 N, R 38 E, S 11 BT
- Fir 17" S 44°44' W, 34.00 ft., scribed T 1 N, R 38 E, S 10 BT
- Fir 7" N 62°23' W, 16.80 ft., scirbed T 1 N, R 38 E, S 3 BT

I nailed a brass washer marked OPLS 1097 to BT blazers.
 I set a steel fence post 5 ft. East with sign 54-4 & 54-2.
 I painted a red band around BT's and face of scribe.
 I used a steel tape and WILD T16 and measured a horizontal distance to the center of the BT's.
 This corner was set 8/13/80, witness by Patrick Murphy.
 See map of survey.

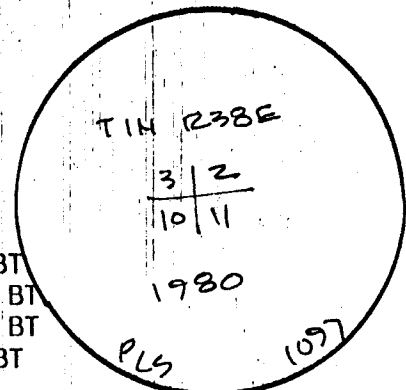

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

James H. Buisman

OREGON
 JULY 22, 1977
JAMES H. BUISMAN
 1097

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the day of ..
 by
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
 SURVEYOR**

Date Received _____
 Date Filed _____
 By _____ GPO 796.333
 File No. 42-84 R