

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Timothy W. Davenport under GLO contract number 102, dated July 20, 1863. Surveyor General record states:

Set 1/4 Sec post from which:

A white fir 14 in dia bears N60°E 28 lks


A white fir 16 in dia bears S65°E 39 lks

Rufus S. Moore, under GLO contract number 382, dated March 23, 1881 calls setting a new post for the 1/4 sec cor.

Survey number 23-80 by Duane I. Griffith, OPLS 644, found no evidence of the original corner and at the proportionate position, set a brass cap monument. The survey calls the monument as being marked as shown with bearing trees as follows:

A 24 inch diameter Spruce bears N30°E, 53.0 feet marked T2S R39E 1/4 33 BT

A 12 inch diameter Tamarack bears S22°E, 39.6 feet marked T1S R39E 1/4 4 BT

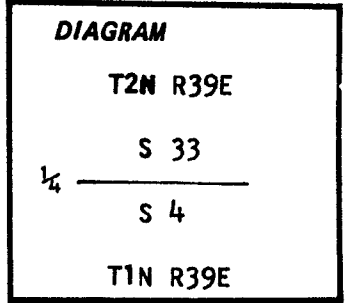

Description of corner evidence found:


Found monument and bearing trees as described above except I find the cap marked properly (T1S is T1N in the field) and the blazes on the bearing trees read T2N and T1N (not T2S and T1S)

Description of monument and accessories I established to perpetuate the original location of this corner: NONE

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1972
GREGORY T. BLACKMAN
991

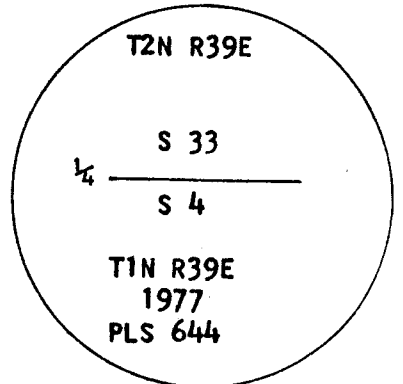

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR

Date Received 7-33-84
TCPO-798-276

Date Filed 9-25-84

By G. LANGLITZ, DEPUTY

File No. 939-84 R

SEE Survey 44-84