

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Joseph G. Gray and William H. Odell under joint GLO contracts no. 120, dated May 27, 1867. Surveyor General record states:

Set 1/4 section corner post, from which;

A Pine 10 in dia bears S25°W, 43 lks

A Pine 12 in dia bears N15°E, 56 lks



DIAGRAM

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner monument or accessories.

ODOT MAP 4B-26-11 calls finding "charcoal buried 2 feet".

Survey 31-72 established position for 1/4 corner based on ODOT map ties.

See Minor Partition 1994-01.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:




At position determined by survey 31-72, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown below, 36" in the ground, from which;

A 5/8" x 30" iron pin (rebar) bears S20°E, 102.55 with 1 1/2" aluminum cap marked "UNION COUNTY SURVEYOR SE RP".

A 5/8" x 30" iron pin (rebar) bears S10°W, 96.67 feet with 1 1/2" aluminum cap marked "UNION COUNTY SURVEYOR SW RP".

A 5/8" x 30" iron pin (rebar) bears N54°W, 28.90 feet with 1 1/2" aluminum cap marked "UNION COUNTY SURVEYOR NW RP".

A 5/8" x 30" iron pin (rebar) bears N62°E, 56.12 feet with 1 1/2" aluminum cap marked "UNION COUNTY SURVEYOR NE RP".

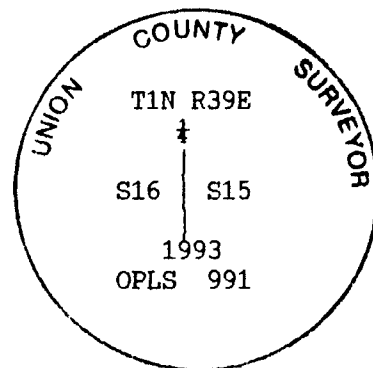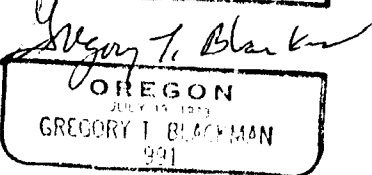

I hereby certify that the above corner point was perpetuated as hereon described on November 23, 1993. Witness: Jeff Petersen, Mike Schlegel.

UNION COUNTY SURVEYOR

---

Date Received 1-24-94

Date Filed 1-24-94

By R. ROBINSON, DEPUTY

File No. 002-1994 R

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to the center of the 1 1/2" aluminum cap.

**HORIZONTAL CONTROL DATA  
UNION COUNTY, OREGON  
OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200104

QUARTER COMMON TO: 15 & 16

TWP. 1 N. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: 10 JAN. 2001

LAT: 45 ° 33 ' 54.54253 " N

SURVEYOR: GREGORY T. BLACKMAN  
OPLS 991

LONG: 117 ° 55 ' 57.20142 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 702588.490 INT FT.

E: 8859530.275 INT FT.

TYPE: GPS

THETA: 1 ° 49 ' 14.863507 "


ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9999184927

ELEV: 2722.01 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:



Renewal Date: Dec. 31, 2001

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)