

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

None

No record of further monumentation found in Union County survey records.

T 1 N R 39 E M-05

DESCRIPTION OF CORNER EVIDENCE FOUND:


NONE

See Survey Number 025-1998

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by the survey I set a 2 1/2" x 30" aluminum pipe with cap 25 inches in the ground with a 1 foot mound of stone, from which:

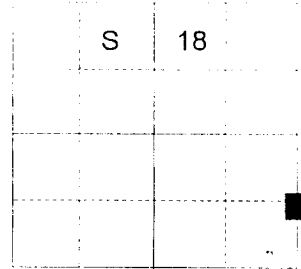

NEW BEARING OBJECTS AND TREES:

A 23 inch Dia. Ponderosa Pine bears S 58° W, a distance of 133.11 feet, marked S 1/16 S17 BT

A 10 inch Dia. Ponderosa Pine bears S 20° W, a distance of 151.29 feet, marked S 1/16 S17 X BT

No trees were available in section 18.


I hereby certify that the corner was monumented on July 30, 1998.

Witness: Jeff Madsen, Greg Engelgau, and Norb Volny.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 1990

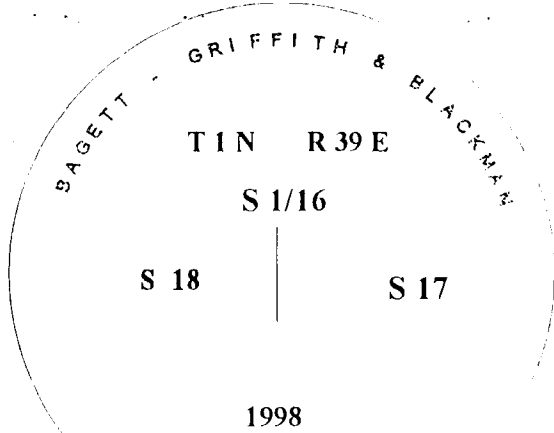

OPLS 2219

UNION COUNTY SURVEYOR

Date Received 8/10/98

Date Filed 8/29/98

Filed By [Signature]

File Number 024-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. Distances are to a 60d spike driven into the root crown of the bearing tree in the right side. A brass washer marked OPLS 2219 was attached to the BT blaze.