

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner not previously established.

No record of monumentation found in Union County survey records.

T 1 N R 39 E R-10

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE



See Survey Number 033-2004

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" iron pin with 2 1/2" aluminum cap, marked as shown, 16 inches in the ground from which:

NEW BEARING OBJECT and TREE:

A 5/8 inch iron pin with 2 inch aluminum cap bears N 47°50' E, a distance of 45.37 feet, marked "BGB SURVEY MARKER NE RP".

An 11 inch diameter Ponderosa Pine bears S 8° E, a distance of 58.88 feet, marked W 1/16 S 28 BT


Raised mound of stone around monument, 2 ft. base to top of cap. Set steel fence post approximately 1 ft. North of corner monument.

I hereby certify that the corner was monumented on October 7, 2004.

Witness: Greg Blackman, Jr.



Renewal Date December 31, 2004

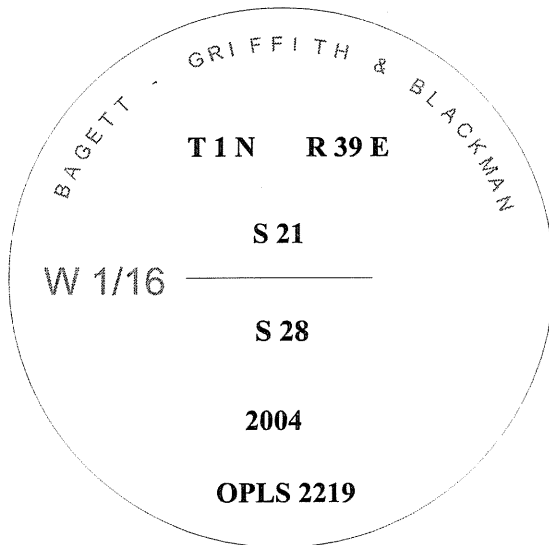

UNION COUNTY SURVEYOR

Date Received 11/15/04

Date Filed 11/16/04

Filed By [Signature]

File Number 059-2004R

I used Leica GPS 530 in the establishment of the new bearing object. The basis of bearing is that of survey number 033-2004. Distances are to the center of the bearing object. I used a steel tape and magnetic compass in the establishment of the bearing tree. I used 18° East magnetic declination and the distance is to a 50d nail set in the right side of the root crown. I set a brass washer marked OPLS 2219 on the BT blaze.