


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Surveyed by contract #120 May 27, 1867

**Notes read;**

Set post corner for sections 21, 22, 27 and 28 from which  
 A pine 11 ins in diam, bears N55°E 112 lks dist.;  
 A pine 11 ins in diam, bears S30°E 175 lks distance.;  
 A pine 24" in diam, bears S20°W 225 lks dist.;




**Description of corner evidence found:**

At S20°W I found a stump with a blazed piece of wood along side.  
 On the back side of the blazed piece I found A scribe which was part of (T)  
 for the BT scribed on the tree.  
 At south 30° east I found a pine stump approximately 14" in diam. No scribe  
 was found. The distance of 175 lks fits the call of original notes.

**Description of monument and accessories I established to perpetuate the original location of this corner**

At the position of the corner I set a 2 inch brass cap on a 30" galv. pipe approx. 2 feet in the ground.  
 From the monument set the following bearing trees are;  
 A pine 22" in diameter N6°W a dist. of 85.3 ft.; marked T1N, R39E S21, BT.  
 A pine 24" in diameter S35°E a dist. of 42.5 ft.; marked T1N, R39E, S27, BT.;  
 A pine 26" in diameter S86°W a dist. of 70.3 ft.; marked T1N, R39EWM S28BT.  
 No tree in NE corner.

I stamped the disk.

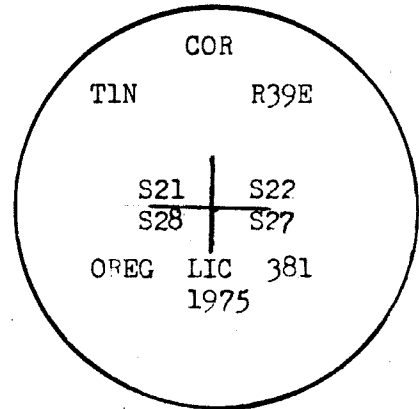

Office of.....County Surveyor..... County of.....Union.....  
 State of...Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the 13 day of May, 1975  
 \_\_\_\_\_ by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 93-84 R

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200419

SECTION CORNER COMMON TO SECTIONS 21, 22, 27 AND 28

TWP. 1 N. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: October, 2004

LAT: 45 ° 32 ' 36.05708 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 117 ° 55 ' 55.76799 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 694646.675 INT FT.

E: 8859884.809 INT FT.

TYPE: GPS

THETA: 1 ° 49 ' 15.8800765 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999159323

ELEV: 2698.24 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is 3" brass cap monument  
Approximately 50 feet South of skid road



REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date December 31, 2004

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)