

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Joseph G. Gray under GLO contract Number 120, dated May 27, 1867. GLO record states:

Set 1/4 section cor, deposited marked stone and raised stone mound as per instructions.

No record of further monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner.

See Survey Number 021-2010

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with cap, marked as shown, 18 inches in the ground from which:

NEW BEARING TREES:



- An 18 inch diameter Douglas Fir bears N 73° E, a distance of 21.11 feet, marked 1/4 S28 BT
- An 18 inch diameter triple bole Ponderosa Pine bears S 67° E, a distance of 30.44 feet, marked 1/4 S33 BT
- A 16 inch diameter Ponderosa Pine bears S 62° W, a distance of 52.23 feet, marked 1/4 S33 BT
- A 8 inch diameter Douglas Fir bears N 34° W, a distance of 49.85 feet, marked 1/4 S28 BT

Raised mound of stone, 3 ft. base to top of cap.

I hereby certify that the corner was monumented on August 20, 2010.

Witness: Jeff Hsu

T 1 N R 39 E V-11

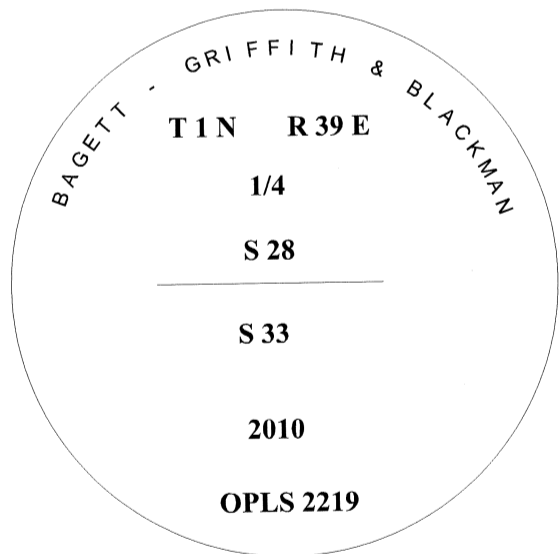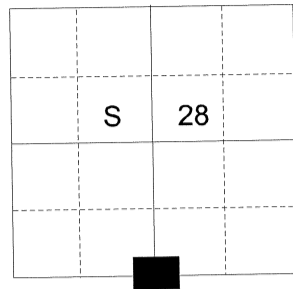

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

**UNION COUNTY
SURVEYOR**

Date Received 8/25/2010

Date Filed 8/25/2010

Filed By *Jeff G. Blum*

File Number 034-2010 R

I used a steel tape and magnetic compass in the establishment of the bearing trees. I used 18° East magnetic declination and the distance is to a 50d nail set in the right side of the root crown. I set a brass washer marked OPLS 2219 on the BT blaze.