


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:  
None

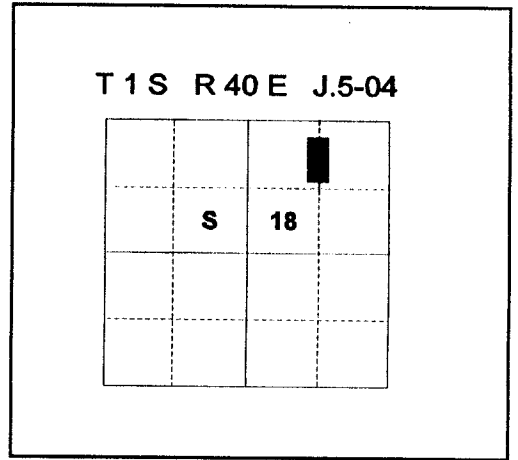

No record of subsequent monumentation found in Union County survey records

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County Survey Number 034-1996.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by survey, I set a 5/8"x30" rebar with 1 1/2" aluminum cap marked as shown, 28 inches in the ground, from which;


NEW BEARING TREES:

A 28" Diameter Ponderosa Pine bears N9°E, 95.58 feet, marked C-N-NE 1/64 S18 BT.

A 4" Diameter Ponderosa Pine bears S14°E, 12.89 feet, marked X BT.

I hereby certify that the corner was monumented on August 12, 1996.

Witness: Jeff Madsen, Mark Durbin

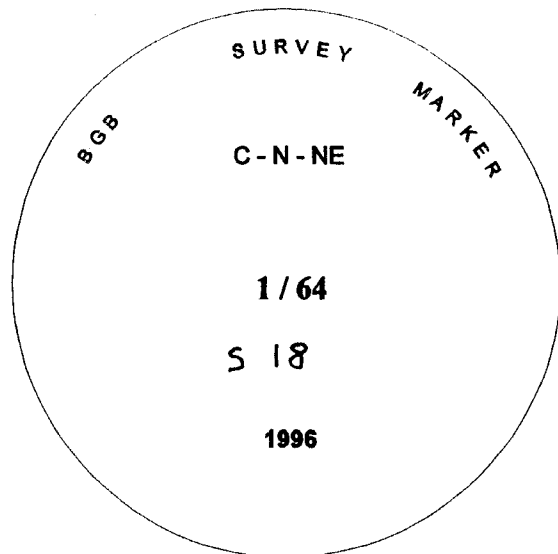

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Jeffery P. Petersen*

OREGON  
JULY 20, 1993  
JEFFERY P. PETERSEN  
2625

Renewal Date: December, 31 1996

**UNION COUNTY  
SURVEYOR**

Date Received 8-15-96

Date Filed 8-15-96

Filed By R. ROBINSON, Deputy

File Number 090-1996R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination, the distances are to 50d spike driven in the right side of the root crown of the bearing trees. I attached a brass washer marked OPLS 2625 to the BT Blaze.