


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. J-03

History of original corner establishment:

Original corner established in 1898 by Alonzo Gesner under contract #683. He set a Fir Post 4"x3"x3", 24" in ground. From which:
A 8" Pine bears S14°30'E, 7 lks.
A 14" Tamarack bears N21°30'E, 18 lks.

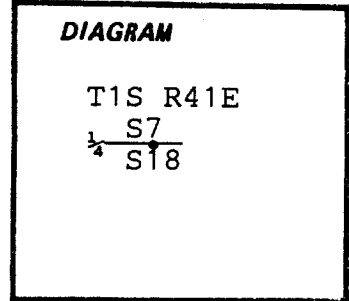

Description of corner evidence found:

No corner monument found.
No bearing trees found.

Description of monument and accessories established to perpetuate the original location of this corner:

By single proportioning, I set 2½"x30" aluminum capped aluminum pipe rising 6" above ground in a mound of stones. Set a steel fence post 3 ft. north of corner.

Cap is stamped:

T1S R41E
S7
¼ S18
RLS1848
1986

New BT's:


A 12" Western Larch bears N13½°E, 18.3 ft., blazed&scribed: ¼S7BT
An 8" Western Larch bears S82½°E, 14.7 ft., blazed&scribed: ¼S18BT

Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982. A ¾" brass disk stamped "RLS1848" is nailed to lower end of blazes.

To find corner follow Rd. 6200620 South to the end then follow ridge top 3/8 mile south, corner is in fringe of trees between two clearcuts.

Compass Declination: 19½°E
Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on Oct. 6, 1986.

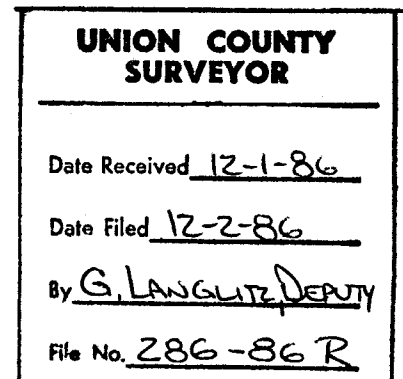

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL) (DEPUTY)