

Line Tree
S-1 to T-1

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


Line Tree between corners S-25 & T-25

History of original corner establishment:

Original line tree established in 1882 by Henry Meldrum under contract #450.

At 46.35 chains, a 20" Fir, a line tree marked with 2 notches on the N. & S. sides.

In resurvey by Alonzo Gesner in 1898 under Contract No. 683, he stated he found a 20" Fir with 2 notches on N & S sides at 46.95 chains.



Description of corner evidence found:

I found a dead standing 24" Doug Fir snag, 16 ft. high with 2 notches on the north and south sides, tree poor condition, bark loose.

Description of monument and accessories I established to perpetuate the original location of this corner:

I removed the bark at 6 ft. high, painted a red band and nailed 54-9 signs on the north and south sides. I set a steel fence post with 54-2 and 54-9 signs attached 5.8 ft. North of the line tree.

New BT's:


A 9" Western Larch bears N23°E, 68.8 ft., blazed&scribed: APT1SR41ES30BT
An 11½" White Fir bears N73½°W, 41.7 ft., blazed&scribed: APT1SR40ES25BT

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. A ¾" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes.

To find corner, from the intersection of 6200635 and 6200470 go west 300 feet to fence line follow south 250 feet to line tree 10 feet east of fence on gentle westerly slope.

Compass declination: 19½°E
Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were established as hereon described on Nov. 11, 1986

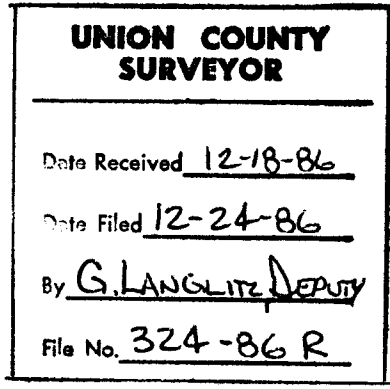

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)