

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established for Joel Brown by J.L. Curtis county surveyor, dated March 25, 1893. County record states:

Set a stake for Cen of Sec.

No record of further monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey Number 023-1998

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At surveyed position, I set a 2 1/2 x 30" Aluminum pipe with cap as shown 36 inches in the ground from which:

NEW BEARING OBJECTS AND TREES:

A 5/8" x 30" Iron Rebar with 1 1/2" Aluminum Cap bears N 11° E, a distance of 15.12 feet, marked NE RP


A 5/8" x 30" Iron Rebar with 1 1/2" Aluminum Cap 10 inches below ground, bears S 43° E, a distance of 21.37 feet, marked SE RP

A 12" Ponderosa Pine bears S 53° W, a distance of 157.19 feet, marked X BT

A 15" Ponderosa Pine bears West, a distance of 68.74 feet, marked C 1/4, S28, BT

I hereby certify that the corner was monumented on July 17, 1998.
Witness: Jeff Madsen, Greg Engelgau, and Norb Volny.


T 2 N R 40 E T-11



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1999

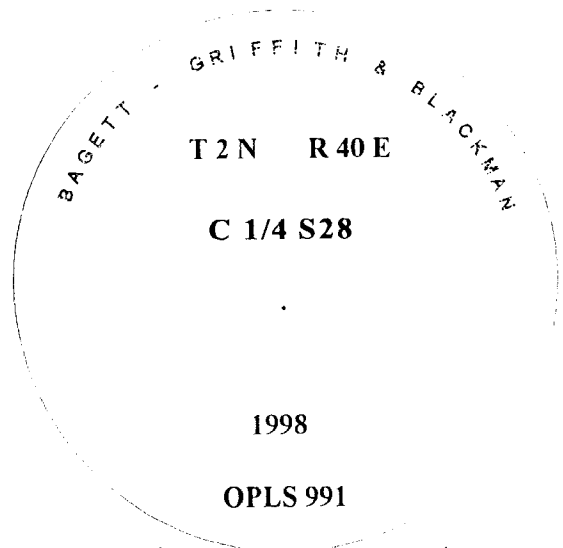

UNION COUNTY SURVEYOR

Date Received 7/20/98

Date Filed 8/29/98

Filed By R. ROBINSON, DEPUTY

File Number 032-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to the center of the reference object. BT distances are to a 60d spike driven into the right side of the root crown. A brass washer marked OPLS 991 is attached to the BT Blaze.