


CERTIFIED RECORD OF LAND SURVEY MONUMENTATION

History of original corner establishment:

Corner originally established by Henry Meldrum under GLO contract number 450, dated June 11, 1882. Surveyor General record states:

Set basalt stone 15x8x6 ins. 10 in. in ground for cor to secs 17 and 18 marked with 4 notches on S and 2 on N edges, from which;

- A pine 6 in diam bears S14°E 202 lks dist marked R37E S18 BT
- A pine 16 in diam bears N42°E 89 lks dist marked T2S S7 BT
- A pine 4 in diam bears S57°W 242 lks dist marked R36E BT

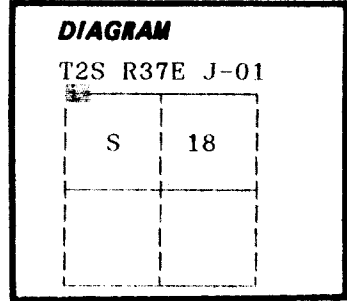

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.

Found a 22 inch diameter Ponderosa Pine snag N42°E, 89 lks, with faint scribes visible.

Found no evidence of the remaining original bearing trees.

See map of survey dated November, 1989.

Description of monument and accessories established to perpetuate the

original location of this corner: From a position determined from the original BT, thence East 3.00 feet to a point on the Range line; I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:


- New Bearing Trees:**
- A 11 inch diameter Ponderosa Pine bears N51°E, 21.94 feet marked T2S R37E S7 BT
 - A 21 inch diameter Ponderosa Pine bears S76°E, 23.72 feet marked X BT
 - A 9 inch diameter Ponderosa Pine bears S34°E, 131.48 feet marked T2S R37E S18 BT
 - A 7 inch diameter Ponderosa Pine bears North, 22.92 feet marked X BT

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs

Set a steel fencepost approximately 5 feet North with land survey monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on October 25, 1989.

Witnesses: Rick Robinson and Jeff Petersen

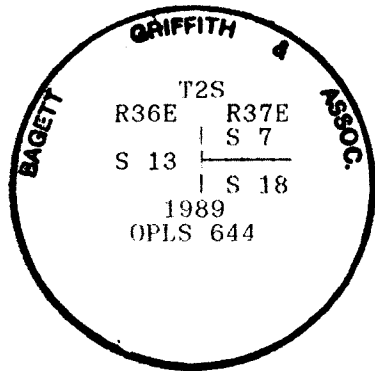

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith
**OREGON
JULY 16, 1964
DUANE I. GRIFFITH
644**

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of.....

(COUNTY OFFICIAL)

**UNION COUNTY
SURVEYOR**

(DEPUTY)

Form R6-7100-57 (9/71)

Date Received 12-27-89

*GPO-591-971, 1988

DUANE I. GRIFFITH

J-01

RICK ROBINSON DEPUTY

File No. 372-39R