


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

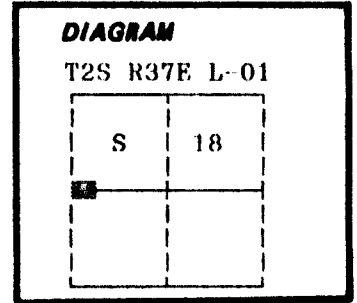

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Corner not previously established

See map of survey dated November, 1989.

Description of monument and accessories I established to perpetuate the

original location of this corner: At the proportionate position between the section corner North and South, on the Range line; I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:

New Bearing Trees;


- A 15 inch diameter Ponderosa Pine bears N17°E, 5.09 feet marked Y BT
- A 14 inch diameter Ponderosa Pine bears N71°E, 7.78 feet marked X BT
- A 20 inch diameter Ponderosa Pine bears South, 15.23 feet marked ¼ S18 BT
- A 17 inch diameter Ponderosa Pine bears S77°E, 38.26 feet marked F BT

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fencepost approximately 5 feet North with land survey monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on October 25, 1989.

Witnesses: Rick Robinson and Jeff Petersen

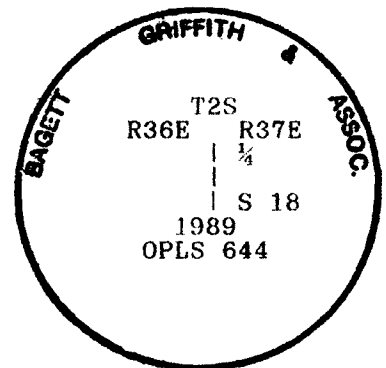

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith
OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....

I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

UNION COUNTY SURVEYOR
(COUNTY OFFICIAL) (DEPUTY)

Date Received 12-27-89
Date Filed 12-27-89
By R. ROBINSON, DEPUTY
File No. 266-89R