

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
NONE

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey Number 030-2002

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position of the 1/16 corner established by Survey Number 030-2002, I set a 5/8" x 30" iron pin with a 2 1/2" aluminum cap marked as shown below, 28" in the ground, from which;


NEW BEARING TREES:

A 12" diameter White Fir bears South 46° East, a distance of 11.50 feet marked SW1/16 S13 BT.

A 8" diameter Lodgepole Pine bears South 32° West, a distance of 34.71 feet, marked SW1/16 S13 BT.

I set a steel fence post 1 ft. North of the monument. There is an existing north-south fenceline 35.0 ft. South of the monument.


I hereby certify that the corner was monumented on August 13, 2002.
Witness: Norbert W. Volny and Gregory T. Blackman Jr.

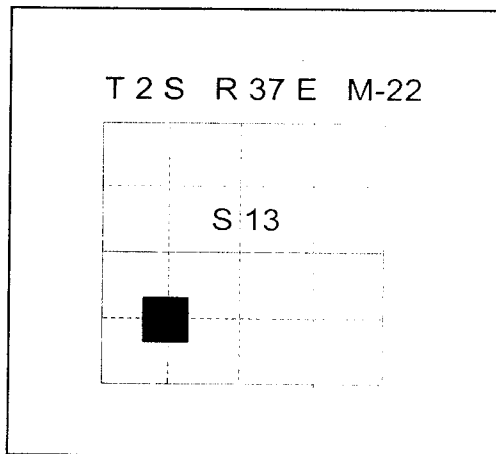

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

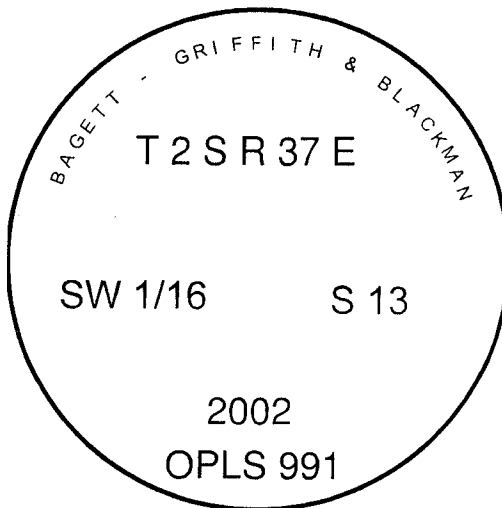

**UNION COUNTY
SURVEYOR**

Date Received 8/16/02

Date Filed 9/18/02

Filed By R. ROBINSON, DEPUTY

File Number 035-2002R

I used a Leica TCA-1100 and prism in the establishment of the new accessories. The basis of bearings is the same as that shown on Survey No. 030-2002, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 991 to the BT blaze.