

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

R-21

**History of original corner establishment:**


Set gray slate stone 20"x10"x5", 10 inches in ground, for corner to sections 23, 24, 25, and 26, from which:

A tamarack, 15" diameter, bears N 32 W, 21 lks. distance

A fir, 20" diameter, bears N 47 E, 52 lks. distance

A tamarack, 12" diameter, bears S 10 E, 78 lks. distance

A pine, 10" diameter, bears S 11 W, 70 lks distance



**Description of corner evidence found:**

Found gray slate stone 20"x10"x5".

Found tamarack with scribe and down at S 10 E, 78 lks. distance

**Description of monument and accessories established to perpetuate the original location of this corner**

At the corner a 2" galvanized pipe with brass cap was set marked: →


from which:

11" pine, N 49 E, distance 17.8', marked T2S R37E S24 BT

14" red fir, S 12 E, distance 15.5', marked T2S R37E S25 BT

14" red fir, S 17 W, distance 25.8', marked T2S R37E S26 BT

8" red fir, N 84 W, distance 7.6', marked T2S R37E S23 BT

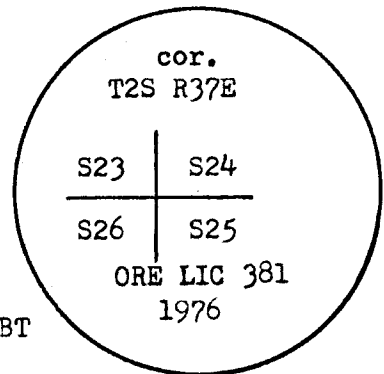

<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
By	_____
File No. <u>317-84R</u>	

*Witness finding B.T. -  
Medford R. Hornator*

Office of County Surveyor County of Union  
 State of Oregon, I hereby certify that the within instrument was filed in this office File No. 317-84R  
 for record on the 27 day of December, 1976, at 4 o'clock P.m., (signed)  
 \_\_\_\_\_ by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)

RECORDED  
 MAY 11 1976  
 CLERK OF COUNTY