


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 corner at midpoint on the line between the Northwest corner and the North 1/4 corner of the section.

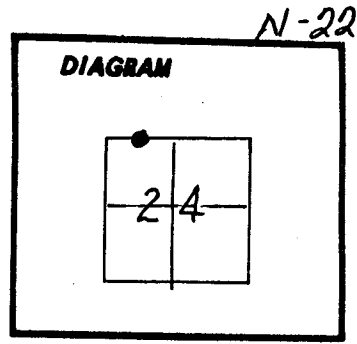

Description of corner evidence found:

None

(See map of Survey, dated July 1979)

Description of monument and accessories I established to perpetuate the original location of this corner:


At the corner point I set 2½" x 30" iron pipe with brass cap marked as shown, 20" in ground, from which:

A 22" Juniper Bears S. 58 E., 9 ft. marked  
W 1/16 S24 BT.

A 24" P. Pine Bears N. 10 W. 71.4 ft. marked  
W 1/16 S13 BT.

Raised mound of stone.

Nailed brass washer to BT. blazes,  
used steel tape and magnetic  
compass with 20° declination.  
Measured to center of BTs.

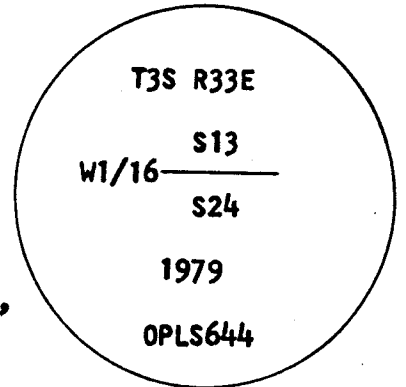

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Duane I. Griffith*

OREGON  
JULY 10, 1984  
**DUANE I. GRIFFITH**  
644

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

**ION COUNTY  
SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 345-84 R