

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original 1/4 Corner set by Rufus S. Moore, under Contract No. 451, dated June 12, 1882.

Surveyor General Record states:

Set post 3 ft. long for 1/4 corner from which:

- A Pine 4" diameter bears N26E, 5 LKS
- A Pine 4" diameter bears S34E, 13 LKS

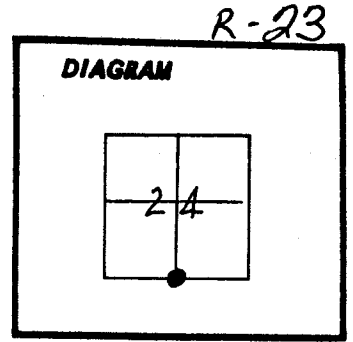

Description of corner evidence found:

None


(See map of Survey, dated July, 1979.)

Description of monument and accessories established to perpetuate the original location of this corner:

At proportionate distance between the Southwest Corner and the Southeast corner of section I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 27" in ground, from which:

- A 10" Fir Bears N. 33 E., 4.3 ft. marked 1/4 S24 BT.
- A 11" Fir Bears S. 38 E., 26.0 ft. marked 1/4 S25 BT.

Raised mound of stone.

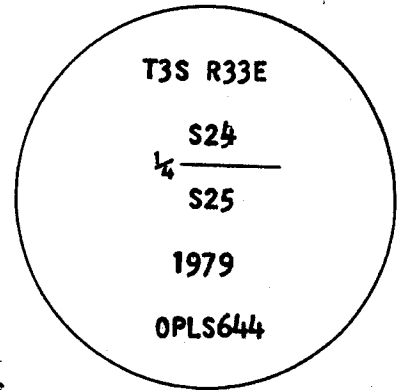

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° East declination. Measured to center of BTs.

REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by

(DEPUTY)

Form R6-7100-57 (9/71)

**UNION COUNTY SURVEYOR**

---

Date Received 8-1-78 700-270

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 357-84R