


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established in 1882 by Rufus S. Moore under general land office contract no. 451. Surveyor General Record States;

Set basalt stone 10"x9"x7" for  $\frac{1}{4}$  corner, marked  $\frac{1}{4}$  on W. face, Raised mound of stone along side.

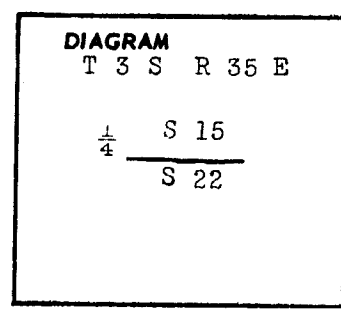

Description of corner evidence found:

Found stone of called size in a mound of stone marked  $\frac{1}{4}$

Description of monument and accessories I established to perpetuate the original location of this corner I set a 2 $\frac{1}{2}$ "x30" galvanized iron pipe with brass cap 17" in the ground and raised a mound of stone at the point at which the stone lay, from which; New BT.

A pine 15" in diameter bears S 13 E a distance of 190.0 feet, marked  $\frac{1}{4}$  S 22 BT.


No tree available in section 15.

I placed a nail and a brass washer marked O.P.L.S. 991 at the BT. blaze.

I used a steel tape and a magnetic compass with 20 degrees East declination set into the compass.

I set a steel fence post 5.0 feet East of the corner.

Note; I buried the stone to the north of the corner.

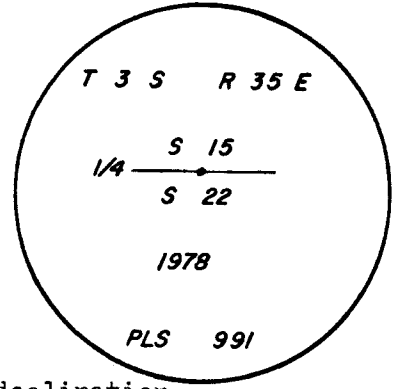

REGISTERED PROFESSIONAL LAND SURVEYOR

*Gregory T. Blackman*

OREGON JUL 3, 1978 GREGORY T. BLACKMAN 991

Office of Surveyor County of Union  
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 18 day of Sept, 1978.  
J. Rose (COUNTY OFFICIAL) by J. Lyle (DEPUTY)

UNION COUNTY SURVEYOR

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 423-84 R  
\* GPO 796-333