


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established in 1882 by Rufus S. Moore under General Land Office contract no. 451. Surveyor General Notes state;

Set basalt stone 12"x12"x6", 8 inches in ground for $\frac{1}{4}$ section corner, marked $\frac{1}{4}$ on west face, 210 feet below top of hill, from which ;

A pine 8 inches in diameter bears N 70 W, 15 links distant, marked $\frac{1}{4}$ S BT.

A fir 9 inches in diameter bears S 30 E, 73 links distant, marked $\frac{1}{4}$ S BT.

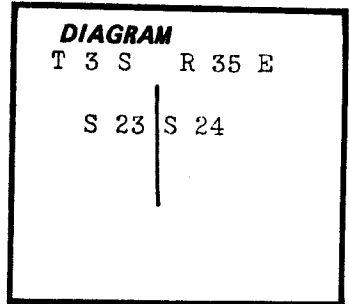

No record of restoration found on the County Records.

Description of corner evidence found:

Found 8" pine dead, scribes visible at N 70 W.
Found evidence of stump at the position of the SE. bearing tree.
I did not find the stone.

Description of monument and accessories I established to perpetuate the

original location of this corner: I set a $2\frac{1}{2}$ x30 inch galvanized iron pipe with brass cap marked as shown right, 25 inches in the ground, at the record bearing and distance from the NW. bearing tree, and raised a mound of stone, from which New BT.S


A 8 " diameter fir bears S 36 E, 5.9 feet distant, marked $\frac{1}{4}$ S 24 BT.

A 10" diameter fir bears N 83 W, 3.4 feet distant, marked $\frac{1}{4}$ S 23 BT.

I placed a nail and a brass washer marked O.P.L.S 991 at the BT. Blaze.

I used a steel tape and a magnetic compass with 20 degrees East declination set into the compass.

I set a steel post with a sign 4.0 feet north of corner.

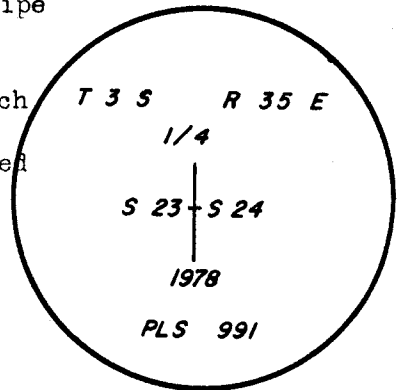

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JUL 13 1978
GREGORY T. BLACKMAN
991

Office of *Surveyor* County of *Union*
State of *Oregon* I hereby certify that the within instrument was filed in this office
for record on the *18* day of *Sept* 1978
J. V. [Signature] by *S. [Signature]*
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____
Date Filed _____
By _____
File No. 429-84R