


Index File No. 29 A-9
 T 25 R. 36E

CORNER RECORD (SEARCH)

Tract or Survey No. _____ Cor. No. _____

Merid. _____ R.D. _____ County _____ State _____
 N.F. _____

CORNER DIAGRAM

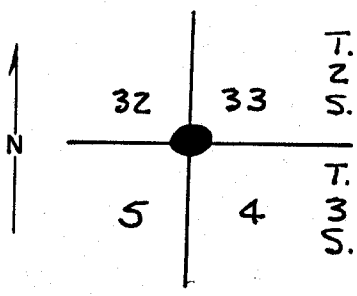

DESCRIBE CORNER MONUMENT FOUND

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A pine 28" dia bears S. 42° E. 29 lks. with scribe marks
 3S R3 visable in partially healed blaze
 A pine 24" dia. bears S. 35 W. 86 lks. with scribe marks
 3S 36E S5 visable in partially healed blaze (Record S. 43 W)
 A root hole bears N. 71° W. 12 lks. with a down and decayed
 pine snag along side 18" dia. with no marks visable

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____


Signature _____ Title _____ Division _____ Headquarters _____ Date _____

CORNER RECORD (PERPETUATION)

7100-52
 REV. 65 5

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set an iron post 28" long 2 1/2" dia. 24" in the ground
 with a brass cap marked



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

From which new bearing trees
 A fir 10" dia. bears N. 54 3/4° E. 64 lks. marked T2S R36E S33 BT
 A fir 12" dia. bears N. 8° W. 23 lks. marked T2S R36E S32 BT

Work Done By Garrison Title C. Surveyor Date 7/75 State Registration No. _____
 or Agency _____

Certified Cor. Record Prepared? Yes _____ No _____ Filed At: _____ Date _____

REMARKS

Index File No. _____ T. _____ R. _____ M. _____ Tract or Surv. No. _____ Cor. _____

UNION COUNTY SURVEYOR

Date Received _____

Date Filed 12-16-87

By G. LANGLITZ, DEPUTY

File No. 200-87R

A-9

Remonumentation of Certain Original Corner Points,
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAINS

A fir, 8 ins. diam., bears S. 62° W., 35½ lks.
dist., mkd. T2S R36E S4 BT.

A fir, 10 ins. diam., bears N. 64½° W., 29 lks.
dist., mkd. T2S R36E S33 BT.

The cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the
Tp., determined at record distance from the remains of the
original bearing trees:

A pine, 28 ins. diam., bears S. 42° E., 25 lks.
dist., with scribe marks 3S R3 visible on
partially healed blaze.

A pine, 24 ins. diam., bears S. 35° W., 86 lks.
dist., with scribe marks 3S 36E S5 visible on
partially healed blaze. (Record, S. 43° W.)

A root hole, bears N. 71° W., 12 lks. dist., with
a down and decayed pine snag alongside, 18 ins.
diam., no marks visible.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 2 S R 36 E
S 32 | S 33
S 5 | S 4
T 3 S
1975

from which new bearing trees

A fir, 10 ins. diam., bears N. 54¾° E., 64 lks.
dist., mkd. T2S R36E S33 BT.

A fir, 12 ins. diam., bears N. 8° W., 23 lks.
dist., mkd. T2S R36E S32 BT.

West Boundary, T. 2 S., R. 36 E.,
Willamette Meridian, Oregon

(Remonumenting corners established by John A. Hurlburt,
Deputy Surveyor, in 1874)

The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of
the Tp., monumented with a basalt stone, 18 x 12 x 8 ins.
(record, 15 x 12 x 8 ins. unmarked), firmly set 8 ins.
in a mound of stone, 2 ft. base, 1½ ft. high, mkd. with
5 grooves on N. and 1 groove on S. face, from which the
remains of the original bearing trees:

A root hole, bears N. 55° E., 60 lks. dist.

A root hole, bears N. 53° W., 57 lks. dist., with
a down and decayed pine snag alongside, 20 ins.
diam., with scribe mark 1 visible on decayed
blaze.

At the corner point

**UNION COUNTY
SURVEYOR**

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 381-2013R

T3536 A09

T2536 V01