


Index File No. T2S R36E A-13 CORNER RECORD (SEARCH) Tract or Survey No. _____ Cor. No. _____
 T 25 R. 36E R.D. _____ County _____
 Merid. _____ N.F. _____ State _____

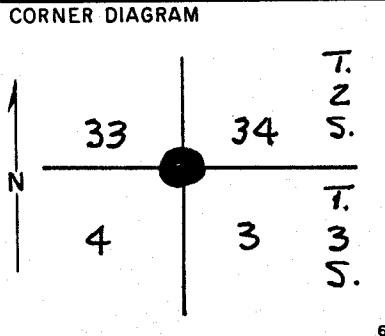

DESCRIBE CORNER MONUMENT FOUND

None

PHOTO IDENTIFICATION DATA
 Photo No. TNW 4-202
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A decayed Western Larch stump 24" dia. bears N. 54° E. 80 lks. With scribe marks BT visible in decayed blaze
 A decayed Western Larch stump 18" dia. bears S. 32° E. 99 lks. no marks visible
 A decayed Western Larch stump 24" dia. bears S. 8° W. 23 lks. with scribe marks BT visible in decayed blaze

PLANE COORDINATE POSITION DATA
 State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER


A decayed fir stomp 30" dia. bears N. 50° W. 6 lks. no marks visible

Signature _____ Title _____ Division _____ Headquarters _____ Date _____ 7100-52
 REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set an iron post 29" long 2 1/2" dia. 24" in the ground with a brass cap marked



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

New Bearing Trees
 A fir 8" dia. bears N. 61 1/4° E. 44 lks. marked T2S R36E S34 BT
 A fir 8" dia. bears S. 47 1/2° E. 69 lks. marked T3S R36E S3 BT
 A fir 8" dia. bears S. 62° W. 35 1/2 lks marked T3S R36E S4 BT
 A fir 10" dia bears N. 84 1/2° W. 29 lks. marked T2S R36E S33 BT

Work Done By Garrison Title C surveyor Date 7/75 State Registration No. or Agency _____

Certified Cor. Record Prepared? Yes _____ No _____ Filed At: _____ Date _____

REMARKS

Index File No. T. R. M. Tract or Surv. No. Cor.

UNION COUNTY SURVEYOR
 Date Received _____
 Date Filed 12-16-87
 By G. LANGLITZ, DEPUTY
 File No. 202-87R

A-13

Remonumentation of Certain Original Corner Points,
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAINS

The $\frac{1}{2}$ sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp., determined at record bearing and distance from the remains of the original bearing trees:

A decayed spruce stump, 18 ins. diam., bears N. 41° E., 33 lks. dist., no marks visible.

A sawed and decayed western larch stump, 32 ins. diam., bears S. 10° W., 29 lks. dist., with scribe marks $\frac{1}{2}$ S visible on open blaze.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E
S 35
 $\frac{1}{2}$ S 2
T 3 S
1975

from which new bearing trees

A spruce, 15 ins. diam., bears N. $4\frac{3}{4}^\circ$ E., $55\frac{1}{2}$ lks. dist., mkd. $\frac{1}{2}$ S35 BT.

A western larch, 12 ins. diam., bears S. $16\frac{1}{2}^\circ$ W., $27\frac{1}{2}$ lks. dist., mkd. $\frac{1}{2}$ S2 BT.

UNION COUNTY SURVEYOR

Date Received 3/5/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 382-2013

The cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., determined at record bearing and distance from the remains of the original bearing trees:

A decayed western larch stump, 24 ins. diam., bears N. 54° E., 80 lks. dist., with scribe marks BT visible on decayed blaze.

A decayed western larch stump, 18 ins. diam., bears S. 32° E., 99 lks. dist., no marks visible.

A decayed western larch stump, 24 ins. diam., bears S. 8° W., 23 lks. dist., with scribe marks BT visible on decayed blaze.

A decayed fir stump, 30 ins. diam., bears N. 50° W., 6 lks. dist., no marks visible.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E
S 33 | S 34
S 4 | S 3
T 3 S
1975

from which new bearing trees

A fir, 8 ins. diam., bears N. $61\frac{1}{2}^\circ$ E., 44 lks. dist., mkd. T2S R36E S34 BT.

A fir, 8 ins. diam., bears S. $47\frac{1}{2}^\circ$ E., 69 lks. dist., mkd. T3S R36E S3 BT.

Remonumentation of Certain Original Corner Points,
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAIN

A fir, 8 ins. diam., bears S. 62° W., 35½ lks.
dist., mkd. T3S R36E S4 BT.

A fir, 10 ins. diam., bears N. 84¼° W., 29 lks.
dist., mkd. T2S R36E S33 BT.

The cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the
Tp., determined at record distance from the remains of the
original bearing trees:

A pine, 28 ins. diam., bears S. 42° E., 25 lks.
dist., with scribe marks 3S R3 visible on
partially healed blaze.

A pine, 24 ins. diam., bears S. 35° W., 86 lks.
dist., with scribe marks 3S 36E S5 visible on
partially healed blaze. (Record, S. 43° W.)

A root hole, bears N. 71° W., 12 lks. dist., with
a down and decayed pine snag alongside, 18 ins.
diam., no marks visible.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

| |
|--------------|
| T 2 S R 36 E |
| S 32 S 33 |
| S 5 S 4 |
| T 3 S |
| 1975 |

from which new bearing trees

A fir, 10 ins. diam., bears N. 54¾° E., 64 lks.
dist., mkd. T2S R36E S13 BT.

A fir, 12 ins. diam., bears N. 8° W., 23 lks.
dist., mkd. T2S R36E S32 BT.

West Boundary, T. 2 S., R. 36 E.,
Willamette Meridian, Oregon

(Remonumenting corners established by John A. Hurlburt,
Deputy Surveyor, in 1874.)

The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of
the Tp., monumented with a basalt stone, 18 x 12 x 8 ins.
(record, 15 x 12 x 8 ins., unmarked), firmly set 8 ins.
in a mound of stone, 2 ft. base, 1½ ft. high, mkd. with
5 grooves on N. and 1 groove on S. face, from which the
remains of the original bearing trees:

A root hole, bears N. 55° E., 60 lks. dist.

A root hole, bears N. 53° W., 57 lks. dist., with
a down and decayed pine snag alongside, 20 ins.
diam., with scribe mark 1 visible on decayed
blaze.

At the corner point

UNION COUNTY
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By JAL DEPUTY

File No. 382-2013R