


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John H. Hurlburt under GLO Contract Number 201, dated August 5, 1873. Surveyor General record states:
Set a post 4 inches square for 1/4 Sec. Cor.

A 14 inch diameter Pine bears N47°W, 49 Lks.
A 10 inch diameter Pine bears S61°E, 46 Lks.

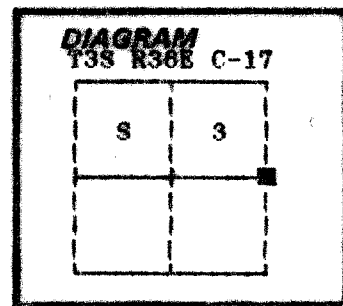

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.
Area had been logged and burned.

See map of Survey Number 028-1992.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the proportionate position, determined by survey, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which:


New Bearing Trees;

- A 12 inch diameter Ponderosa Pine bears N18°E, 20.16 feet marked 1/4 S2 BT
- A 10 inch diameter Lodgepole Pine bears S84°E, 29.73 feet marked 1/4 S2 BT
- A 8 inch diameter Lodgepole Pine bears S84°W, 44.34 feet marked X BT
- A 29 inch diameter Ponderosa Pine bears N34°W, 22.86 feet marked 1/4 S3 BT

Raised a small mound of stone.
Set a steel fence post approximately 5 feet North with a 54-9 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 15, 1992.

Witness: Peter Crabtree
Jim Bennett

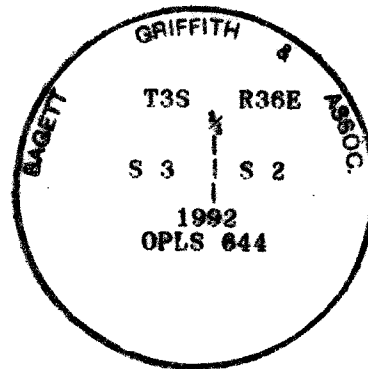

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10 1964
DUANE I GRIFFITH
644

UNION COUNTY
RECORDS

DATE RECORDED 11/27/92
 DATE FILED 11/28/92
 BY Greg Blaker
 File No. 103-1992R