


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

01

History of original corner establishment:

Corner established in 1873 by J. Hurlburt, under General Land Office Contract No. 201. Surveyor General's records state: Set basalt stone 15 x 12 x 10.8 in. in the-ground and made stone mound 2 ft. high for 1/4 Sec. Cor.


Index File No. N-3

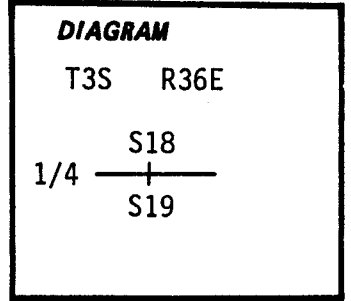

Description of corner evidence found:

No evidence of the original stone could be found.

Description of monument and accessories established to perpetuate the original location of this corner: At a point established by single proportion measurement set 2 1/2"x30" galvanized pipe with brass cap stamped:



Set pipe 16" in ground to rock with mound of stone to cap.

From which:

A P. Pine 11" in dia. bears N1°E, 77.0 ft., scribed 1/4 S18 BT.
A P. Pine 10" in dia. bears S61°E, 53.5 ft., scribed 1/4 S19 BT.
Attached 54-3 signs to both BTs. Attached brass washer stamped LS 1294 to foot blaze of both BTs. Painted blazes and 6" band around both BTs red. Attached 54-4 sign to metal fence post 5' West of corner.

I hereby certify the above corner monument was reestablished as herein described on November 15, 1979.

Witnesses: G. Wagoner
D. Allen
M. Wagoner
G. Lester

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
SEPTEMBER 23, 1977
HOWARD L. PERRY
1 2 9 4

Office of..... County Surveyor..... County of..... Union.....
State of..... Oregon..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 1979.
..... by

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR

Date Received _____

★ GPO—798-276

Date Filed _____

By _____

File No. 434-84R