

25-69A


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

15

1  
P-25

**History of original corner establishment:**

The original survey was by contract in 1882  
The original notes are as follows;  
Run North on W boundary of S 19 T3S R36E set pine post  
from which A pine 6 ins in diam. bears S63½°W 129 lks  
dist.  
A pine 8 ins in diam bears N78°W 149 lks. dist. No trees  
near on east side.

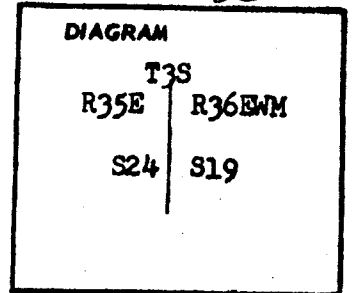

**Description of corner evidence found:**

A pine bearing N78°W 30" in diam was found. The scribe marks were visible on this tree. There was not any other evidence found.

REGISTERED  
OREGON  
LAND SURVEYOR


*James G. Voelz*

MAY 4, 1956  
JAMES G. VOELZ  
381

**Description of monument and accessories established to perpetuate the original location of this corner**

Set 2" galvanized pipe 30" long and 18" in the ground with bronze cap on top and 8" plate welded to the bottom. The hole was back filled with stone and tamped earth and a stone monument was raised around the pipe.

I stamped the disk

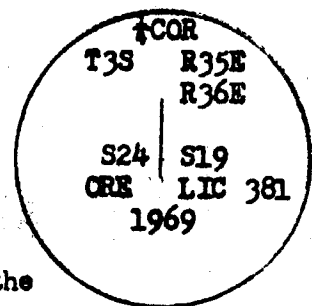

From the corner the original bearing tree is;  
A pine 30" in diam bears N78°W 149 lks dist.  
I set a new bearing tree; A pine 16" in diam bears  
S44°W 101 feet dist measured on the slope to BT on the  
tree. I marked the tree with a scribe  $\frac{1}{4}$  SBT.  
Set a steel fence post with USFS sign 54-4 attached and USFS National  
Forestry Boundary sign indicating National Forest land to east. USFS  
bearing tree signs were placed on the trees facing the corner.

Office of ..... County Surveyor ..... County of ..... Union  
Oregon  
State of ..... , I hereby certify that the within instrument was filed in this office  
for record on the 28... day of ..... July....., 1969., at 9... o'clock A...m., (signed)  
County Surveyor ..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY  
SURVEYOR

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 438-84R