


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. S-5

History of original corner establishment:

None set.

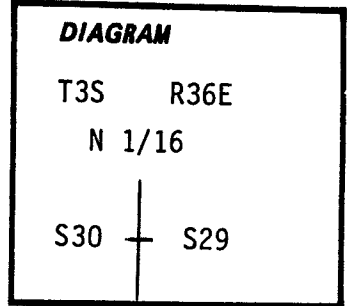


Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner: At surveyed point set 2½"x30" galvanized pipe with brass cap stamped:

Set pipe 12" in ground with mound of stone to cap.

From which:

A P. Pine 13" in dia. bears S1⁰E, 160.0 ft., scribed N1/16 S29 BT.
A P. Pine 15" in dia. bears S57⁰W, 68.7 ft., scribed N1/16 S30 BT.
Attached 54-3 signs to both BTs. Attached brass washer stamped LS 1294 to foot blaze of both BTs. Painted blazes and 6" band around both BTs red. Attached 54-2 and 54-4 signs to metal fence post 5' west of corner. Attached 54-2 and 54-9 signs to metal fence post 5' North of corner.



I hereby certify the above corner monument was established as herein described on November 20, 1979.

Witnesses: G. Wagoner
D. Allen

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
SEPTEMBER 25, 1977
HOWARD L. PERRY
1294

Office of..... County Surveyor..... County of..... Union.....
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19..79

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
☆ GPO—798-276	
Date Filed	_____
By	_____
File No.	452-84R