


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
 Corner not previously established



No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

NONE

See Union County Survey number 33-87

Description of monument and accessories I established to perpetuate the

original location of this corner: At corner position as determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 20 inches in the ground, from which:

New BTs:

- A 12 inch diameter Ponderosa Pine bears S30°E, 79.84 feet marked C¼ S36 BT
- A 12 inch diameter Ponderosa Pine bears S84°W, 70.70 feet marked X BT


Raised a mound of stone around monument, 4 ft. base to top of cap.

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fencepost approximately 5 feet South with land survey monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on November 16, 1987.

Witnesses: Greg Blackman, Rick Robinson and Jeff Petersen

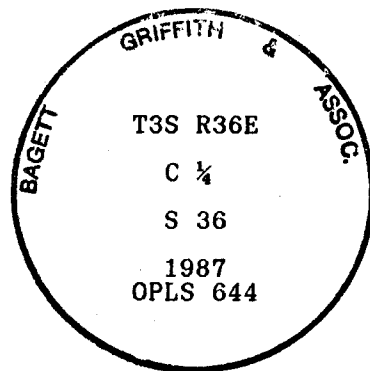

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

OREGON
 JULY 10, 1964
DUANE I. GRIFFITH
 644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 19° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

X-23

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY
 SURVEYOR**

Date Received 11-19-87
 Date Filed 11-30-87
 GPO-798-276
 By G. Langley Deputy
 File No. 158-87 R