


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established

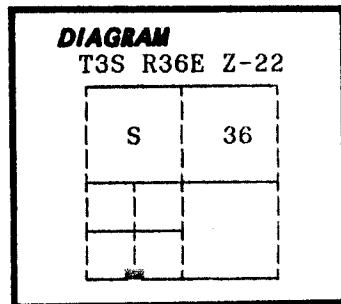

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

NONE

See Union County Survey number 33-87

Description of monument and accessories I established to perpetuate the

original location of this corner: At corner position as determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 12 inches in the ground, from which:

New BTs:

- A 14 inch diameter Ponderosa Pine bears N1°E, 6.65 feet marked W 1/16 S36 BT
- A 16 inch diameter Ponderosa Pine bears West, 23.00 feet marked X BT


Raised a mound of stone around monument, 5 ft. base to top of cap.

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fencepost approximately 5 feet North with land survey monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on November 16, 1987.

Witnesses: Greg Blackman, Rick Robinson and Jeff Petersen

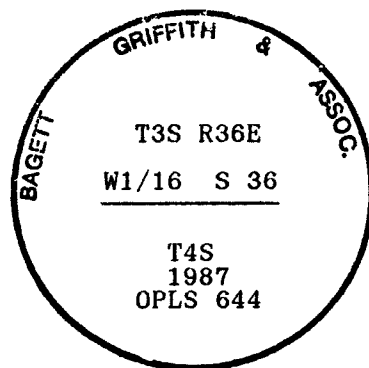

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 19° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Z-22

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received 11-19-87

Date Filed 11-30-87

By G. LANGLITZ DEPUTY

File No. 161-87R