

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by David T. Thompson under GLO contract Number 103, dated September 3, 1863. Surveyor General record states:
Set post for cor to secs 5, 6, 7 & 8 in mound of earth with charred stake, pits, and trenches as per instructions.

Survey number 89-18 (1922 monumentation of LaGrande) calls setting brass screw in lead plug at corner position, and 4 references of brass screws in lead plugs in the curbs.

Surveys 33-67 and 44-80 call a position of the corner.

No record of subsequent monumentation found in Union County survey records

Description of corner evidence found:

Found brass screw in lead plug as per survey 89-18 and 3 of the references:

- Brass screw in lead plug set in curb bearing S58°W, 28.76 feet.
- Brass screw in lead plug set in curb bearing N48°W, 32.05 feet.
- Brass screw in lead plug set in curb bearing N59°E, 29.22 feet.


Description of monument and accessories I established to perpetuate the original location of this corner:

In place of found brass screw in lead plug, I set a 2½" brass cap, marked as shown below, on a 5/8" x 24 copper rod in monument box, from which;

NEW BEARING OBJECTS:

A 5/8" x 30" iron pin with 1½" aluminum cap bears S35°E, 40.14 feet marked UNION COUNTY SURVEYOR SE RP.

I hereby certify that the corner was monumented on March 26, 1996.
Witness: Mark Durbin, Jeff Madsen

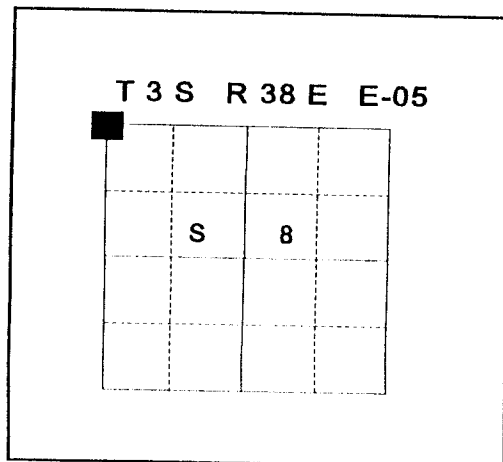


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1997

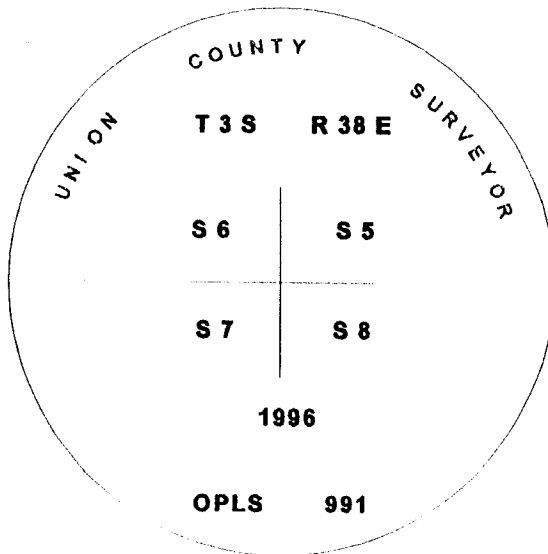

UNION COUNTY SURVEYOR

Date Received 4-22-96

Date Filed 4-22-96

Filed By A. Peterson, Deputy

File Number 048-1996R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination.

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LAGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9624

CORNER COMMON TO: 5,6,7 & 8

TWP.3S, RGE.38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°19'33.07412" N

LONG: 118°05'47.36897" W

SP. COOR: NAD 83(91)

N: 614088.003 INT.FT.

E: 8820160.299 INT.FT.

THETA: 1°42'16.324"

SCALE FACTOR: 0.999898334

ELEV: 2786.740 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
JULY 8, 1966
WALTER L. CASWELL
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007
SHEET 39 OF 66