


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original Survey by David P. Thompson, Contract No. 103, 1863  
40.00 Chains - Set post for 1/4 Section Corner in mound of earth with charred stake, pits and trenches as per instructions.  
41.50 Chains - Brook 3 links wide runs East


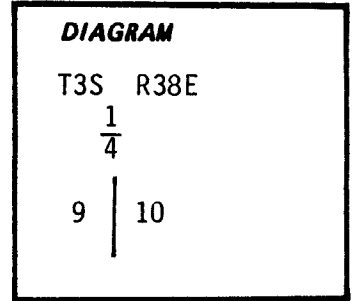


Description of corner evidence found:

No evidence of the original corner was found. Found a 1"x2" wooden stake with Surveyor's stake tack, driven in the top of a 7"x9"x12" high broken fence post, located one foot East of the corner to prominent fences running E-W and S. Point is located at the South edge of a marshy area which extends approx. 150 ft. North. We accept this point as the best evidence of the original corner position. Refer to Union County Survey 19-85 for survey measurements to other corners in the vicinity.

Description of monument and accessories established to perpetuate the original location of this corner:

At the point described above, we set a 2"x30" aluminum pipe 28" in the ground with aluminum cap, marked

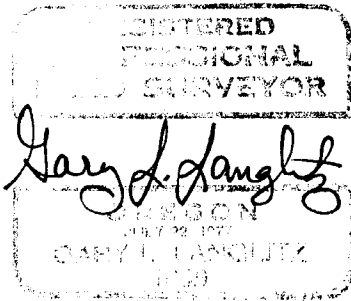

No Accessories Available

August 16, 1985

Anderson-Perry & Associates, Inc.  
Witnesses:

Gary Langlitz LS1099  
Greg Orton

**UNION COUNTY SURVEYOR**  
Date Received 8-26-85  
Date Filed 8-26-85  
By G. LANGLITZ, DEPUTY  
File No. 51-85 R

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by

(DEPUTY)

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200721

1/4 SECTION CORNER COMMON TO SECTIONS 9 and 10

TWP. 3 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: September 28, 2007

LAT: 45 ° 19 ' 6.83206 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 3 ' 19.49853 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 Adams Avenue  
La Grande, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 611748.476 INT FT.

E: 8830799.945 INT FT.

TYPE: GPS

THETA: 1 ° 44 ' 1.19258189 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998979934

ELEV: 2735.15 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is a 2 1/2"x30" aluminum pipe  
with 2 1/2" aluminum cap marked:

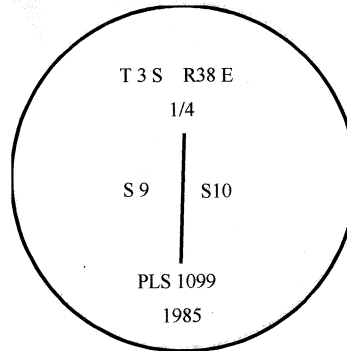

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*  
OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)