


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original Survey by David P. Thompson, Contract No. 103, 1863,

Set post for corner to sections 9, 10, 15 and 16 in mound of earth with charred stake, pits and trenches as per instructions



Description of corner evidence found:


Refer to Union County Surveys 31-83 and 19-85

Found a reference monument, a 2"x3 3/4" brass bushing set in the top of a 6" diameter concrete post, marked "BM Elev. Pt. South 29.4 ft.", located one foot South of a corner of fences running E-W-N along the North side of Gekeler Lane. Refer to the surveys cited above for the relationship of this reference monument to the actual corner position.

Description of monument and accessories established to perpetuate the original location of this corner:

None

UNION COUNTY SURVEYOR
Date Received <u>8-26-85</u>
Date Filed <u>8-26-85</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>49-85 R</u>



Anderson-Perry & Associates, Inc.

Office of..... County of.....
 State of..... I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by David T. Thompson under GLO contract Number 103, dated September 3, 1863. Surveyor General record states:

Set post for cor to secs 9, 10, 15 & 16 in mound of earth with charred stake, pits, and trenches as per instructions.

Surveys 48-71, 51-71, 75-71, 76-71, 78-71A, 72-72, 24-75, 43-77, 55-77, 110-78, and 155-78 call "found corner" or "found brass pipe in concrete".

Surveys 7-79, 31-82, 9-85, and 19-85 call finding brass cap witness corner.

Monumentation record 49-85R describes found "brass bushing" reference corner

No record of subsequent monumentation found in Union County survey records

Description of corner evidence found:

At corner position a 2½" x 3" brass plate set in concrete marked "PI STA." was found.

A 2 1/2" x 3 3/4" brass plate marked "BM ELEV PT SOUTH 29.4 FT" set in concrete was found bearing N2°W, 29.4 feet.

Description of monument and accessories I established to perpetuate the original location of this corner:

NEW BEARING OBJECTS:


A 5/8" x 30" iron pin with 1½" aluminum cap bears N23°E, 31.72 feet marked UNION COUNTY SURVEYOR NE RP.

A 5/8" x 30" iron pin with 1½" aluminum cap bears S41°E, 32.47 feet marked UNION COUNTY SURVEYOR SE RP.

A 5/8" x 30" iron pin with 1½" aluminum cap bears S30°W, 31.41 feet marked UNION COUNTY SURVEYOR SW RP.

I hereby certify that the corner was monumented on March 26, 1996.

Witness: Mark Durbin, Jeff Madsen

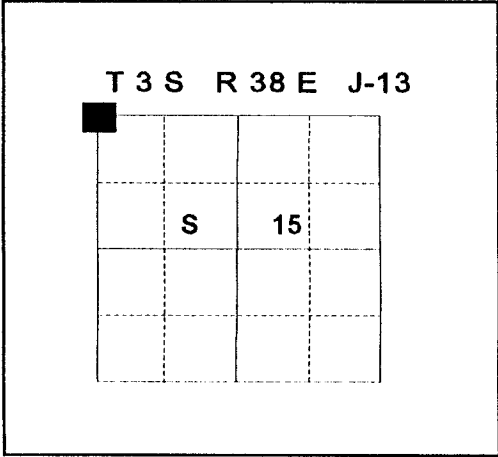

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 12, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1997

**UNION COUNTY
SURVEYOR**

Date Received 4-22-96

Date Filed 4-22-96

Filed By A. Peterson, Deputy

File Number 046-1996 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination.

HORIZONTAL CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)

LaGRANDE & ISLAND CITY, UNION COUNTY OREGON

STA. NAME: 9635

CORNER COMMON TO: 9,10,15 & 16

TWP.3S, RGE. 38E, W.M.

DATE FD.: MARCH, 1996

SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 S.W. LOMBARD AVE.
BEAVERTON, OR. 97008
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 2

GEODETIC COOR: NAD 83(91)

LAT: 45°18'40.54879" N

LONG: 118°03'19.97910" W

SP. COOR: NAD 83(91)

N: 609086.828 INT.FT.

E: 8830846.149 INT.FT.

THETA: 1°44'00.851"

SCALE FACTOR: 0.999897669

ELEV: 2736.363 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Walter L. Caswell

OREGON
JULY 8, 1988
WALTER L. CASWELL
737

EXPIRES 12/31/97

1 meter = 3.280833... U.S. Feet = 39.37 inches exactly
1 meter = 3.280839895 Intl. Feet or 1 inch = 2.54cm. exactly
To Calculate Elevation Factor (in the North American Continent)
Divide 20,906,000 by (20,906,000 + Ellipsoid Elev. in Feet)

JOB 96-007
SHEET 55 OF 66