

UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


No corner was previously established.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None found.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

By proportioned method as per the B.L.M. manual I set a 5/8 inch x 30 inch iron rebar with yellow plastic cap, 28 inches in ground; from which

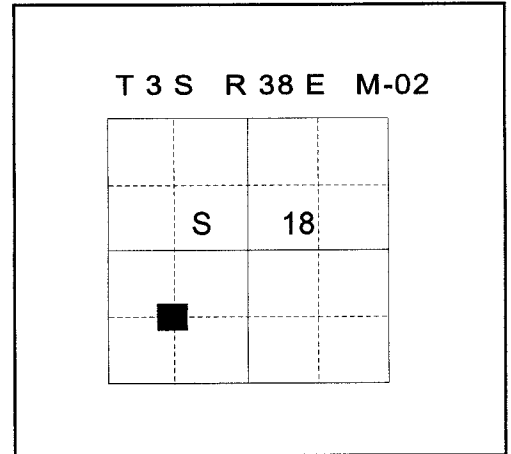

NEW BEARING OBJECTS:

A 9 inch White Fir bears N 5° W, a distance of 19.00 feet marked SW 1/16 S 18 BT.

A 17 inch Ponderosa Pine bears N 83° W, a distance of 34.24 feet marked SW 1/16 S 18 BT.

I hereby certify that the corner was monumented on September 19, 1998.

Witness: Norbert Volny and Greg Engelgau

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1997

UNION COUNTY SURVEYOR	
Date Received	<u>9/21/98</u>
Date Filed	<u>10/20/98</u>
Filed By	<u>R. ROBINSON, Deputy</u>
File Number	<u>088-1998C</u>



I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. Distances were to a 60 dd spike driven in the center of the root crown. The Bt blaze was marked with a brass washer stamped O.P.L.S. 991.