


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner not previously established.

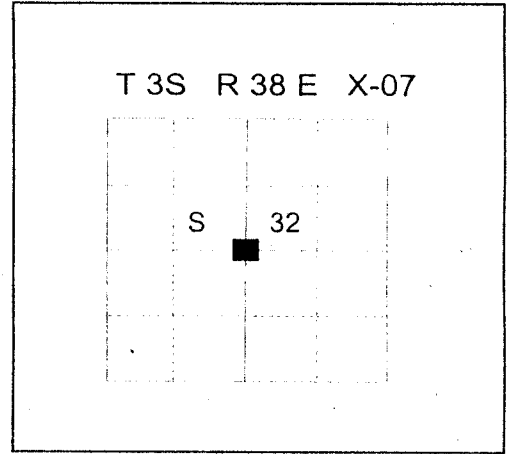

No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Corner not previously established.

See Survey Number 026-2002.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by said survey, I set a 5/8"X30" iron pin with 2 1/2" aluminum cap marked as shown below, 29" in the ground, from which:

NEW BEARING TREES:

An 14" diameter Douglas Fir bears North 59° East, a distance of 22.15 feet, marked C 1/4 S32 BT.

A 10" diameter Western Larch bears North 75° West, a distance of 55.80 feet, marked C 1/4 S32 BT.

An 10" diameter Western Larch bears South 77° East, a distance of 71.40 feet, marked X BT.

A 10" diameter Western Larch bears South 3° West, a distance of 95.10 feet, marked Y BT.

I hereby certify that the corner was monumented on July 15, 2002
Witnesses: Norbert Volny and Greg Blackman, Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

BAGETT - GRIFFITH & BLACKMAN

T 3 S R 38 E

C 1/4

•

S 32

2002

OPLS 991

**UNION COUNTY
SURVEYOR**

Date Received 7/19/02

Date Filed 7/19/02

Filed By R. ROBINSON, DEPUTY

File Number 016-2002R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 18° East. The distance to the bearing trees is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.