

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Survey No. 051-1993 establishes a coordinate position for the Center 1/4

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey No. 010-2001

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position established by Survey Nos. 010-2001 & 051-1993 in a North-South fenceline I set a 2 1/2" x 30" aluminum monument, marked as shown below, 26" in the ground from which:

A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears N52°E, a distance of 5.11 feet, marked UNION COUNTY SURVEYOR NE RP.



A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S50°E, a distance of 5.65 feet, marked UNION COUNTY SURVEYOR SE RP.

A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S53°W, a distance of 17.49 feet, marked UNION COUNTY SURVEYOR SW RP.


A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears N53°W, a distance of 17.65 feet, marked UNION COUNTY SURVEYOR NW RP.

I hereby certify that the corner was monumented on March 6, 2001.
Witness: Norbert Volny and Gregory T. Blackman, Jr.

T 3 S R 40 E L-11

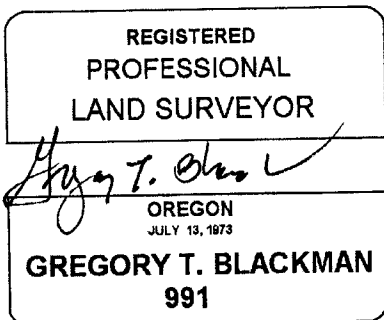

Renewal Date: Dec. 31, 2001

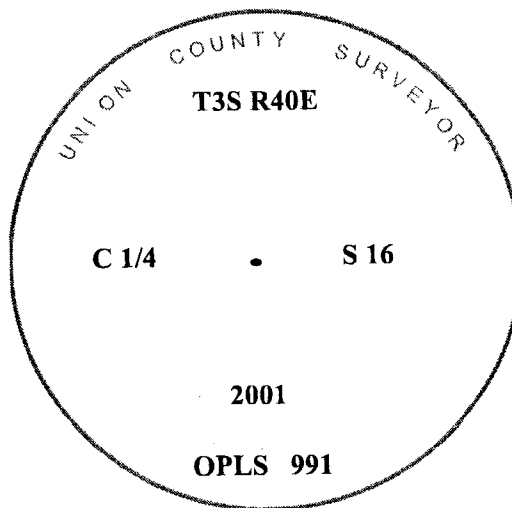

UNION COUNTY SURVEYOR

Date Received 3/27/01

Date Filed 3/31/01

Filed By R. ROBINSON, DEPUTY

File Number 023-2001 R

I used a Leica 530 GPS unit in the establishment of the new accessories. The Basis of Bearings is the same as that shown on Survey No. 010-2001. The distances are to the center of a 5/8"x30" iron pin with 1 1/2" aluminum cap.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200126

CENTER QUARTER SECTION 16

TWP. 3 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: 12 MARCH 2001

LAT: 45 ° 18 ' 14.52954 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 117 ° 49 ' 7.58997 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 608385.081 INT FT.

E: 8891813.954 INT FT.

TYPE: GPS

THETA: 1 ° 54 ' 5.35422069 "



ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9998973638

ELEV: 2820.31 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

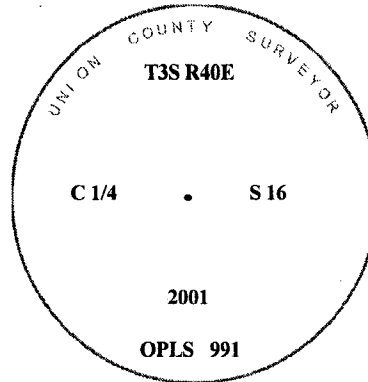

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)