

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract number 355, dated June 14, 1880. Surveyor General record states:
Set stake 4 ft long 4 in diam 18 in ground for ¼ sec corner from which;

A pine 24 in diam bears N15°W 22 lks dist
A fir 18 in diam bears N36°E 27 lks dist

Corner was remonumented by Alonzo Gesner under GLO contract number 683, dated June 7, 1880. Surveyor General record states:

I reestablish as follows: Set fir post 4 ft. long 4 in sq. 24 inches in the ground marked ¼S on the W face from which;
A fir 30 in diam bears N36°E 27 lks dist marks grown over
The other bearing tree had been destroyed. I marked;
A fir 6 in diam bears S54°W 67 lks dist marked ¼S BT

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner post.

Found a 50 inch diameter Douglas Fir stump N36°E, 27 lks burned out with no scribes visible. The cut tree is laying West approximately 20 feet with chop marks. No scribing visible.

Found the rotted remains of a Douglas Fir, size indeterminate, S54°W, 67 lks with slab of wood with scribes visible.

Found no evidence of the Barr Northwest bearing tree.

Distance to the original bearing trees are to the face of the blaze (estimated as if the trees were standing).

See map of survey dated August, 1988.

Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing and distance from the above described bearing trees, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:

New BTs:


A 16 inch diameter Douglas Fir bears S40°W, 30.58 feet marked ¼ S24 BT
A 11 inch diameter Western Larch bears N81°W, 41.58 feet marked ¼ S24 BT

Painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet North with 54-9 and 54-2 signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 29, 1988.

Witnesses: Greg Blackman, Rick Robinson
and Jeff Petersen

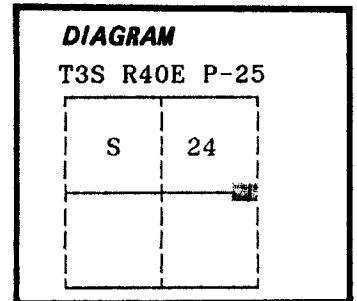


UNION COUNTY SURVEYOR	
Date Received	<u>9-15-88</u>
Date Filed	<u>9-15-88</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>120-88 R</u>

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Handwritten signature of Duane I. Griffith

OREGON
JULY 14, 1964
DUANE I. GRIFFITH
644

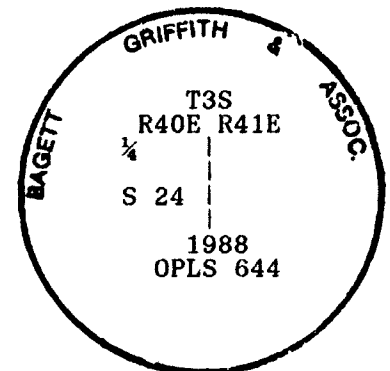

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL) (DEPUTY)