


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by W. B. Barr under GLO Contract 355 dated June 14, 1880. Surveyor General record states:

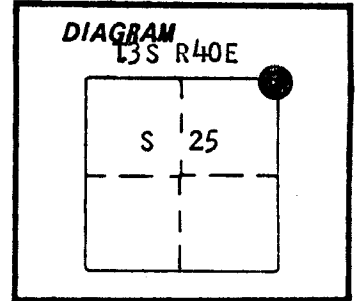

Set a stake for the corner to sections 24, 25, 19, 30. From which:

- A 15 inch diameter Tamarack bears N 10° E, 4 lks.
- A 5 inch Fir bears S 54° E, 23 lks.
- A 4 inch diameter Fir bears N 10° W, 6 lks.
- A 4 inch diameter fir bears S 76° W, 23 lks.

New Bts.

Corner visited by Alonzo Geisner on GLO Contract number 683, dated June 7 1898. Surveyor General record states:

I obliterated the marks on the bearing trees in sections 19 and 30. The bearing tree in section 25 is dead and fallen down, I marked a :

A Red Fir 10 inches in diameter bears S 10° W, 32 lks dist marked T3S R40E S25 BT.

No record of subsequent remonumentation found in county records. Description of corner evidence found:

Bits of wood and soil discoloration at the corner position.

A 17 inch Tamarack stump bears N 10° E, 4 lks. Stump cut too low for scribes.

A stump hole bears S 54° E, 23 lks.

A 14 inch Red Fir bears S 10° W, 32 lks. Tree is dead and down, very rotted, could not determine scribes.

A stump hole bears N 10° W, 6 lks.

See map of survey number 30-86 filed in the office of the Union County Surveyor

Description of monument and accessories I established to perpetuate the

original location of this corner: At the record bearing and distances from the bearing trees and at the point of the ground discoloration and bits of wood, I place a 2 1/2'x30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground and raised a mound of stone with a 2 foot base to top of cap, from which:


A 6'x3'x2' high rock outcrop bears S 78° W, 24.50 feet, marked X B0 on Northerly top.

A 6 inch Douglas Fir bears N 28° W, 24.52 feet, marked X BT.

Set a steel fence post approximately 5 feet North with a 54-9 sign attached.

Corner set: 9/15/86

Witness: Greg Blackman, Rick Robinson

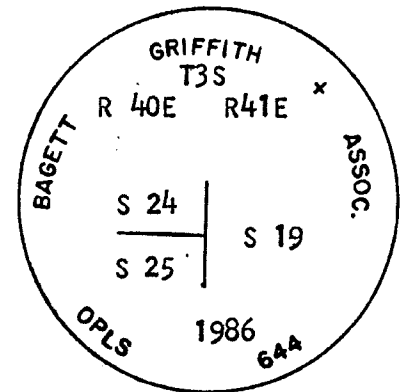

Brass washer marked OPLS 644 nailed to BT Blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d Spikeset in right side of tree when facing tree, unless otherwise stated.



Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

UNION COUNTY SURVEYOR (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 10-20-86

U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

Date Filed 10-27-86

R-25

By G. LANGLIZ, DEPUTY

File No. 245-86 R

VI-12