

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner originally established by Timothy W. Davenport contract No. 102, dated July 20, 1863. Surveyor general record states: Made mound of earth and drove charred stake as per instructions.

No subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of the original corner was found.

See Union County Survey Number 024-2004.

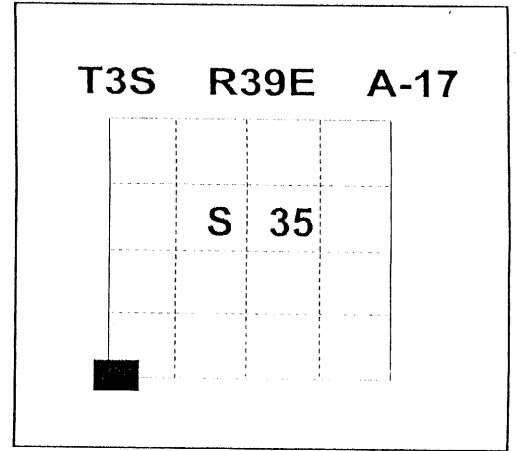

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER: At surveyed position

I set a 2½"x30" aluminum pipe with 2½" aluminum cap in gravel road 6" below surface.

NEW BEARING OBJECTS:


A 5/8"x 30" rebar with 1 ½" aluminum cap bears N 68° 05' E, a distance of 48.11 feet marked NE RP.

A 5/8"x 30" rebar with a 1 ½" aluminum cap bears S 74° 29' E, a distance of 48.16 feet, marked SE RP


A 5/8" x 30" rebar with 1½" aluminum cap bears S 61° 24' W, a distance of 26.11 feet, marked SW RP

A 5/8"x30" rebar with 1½ inch aluminum cap bears N 54° 02'W , a distance of 29.81 feet, marked NW RP.

I hereby certify that the corner was monumented on August 5, 2004
Witness: Mike Spicer

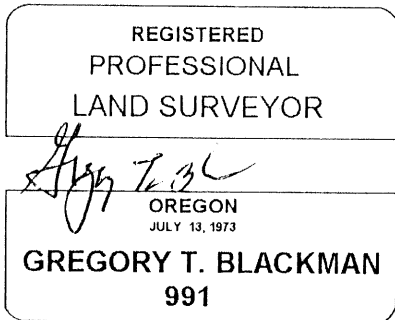

Renewal Date: December 31, 2005

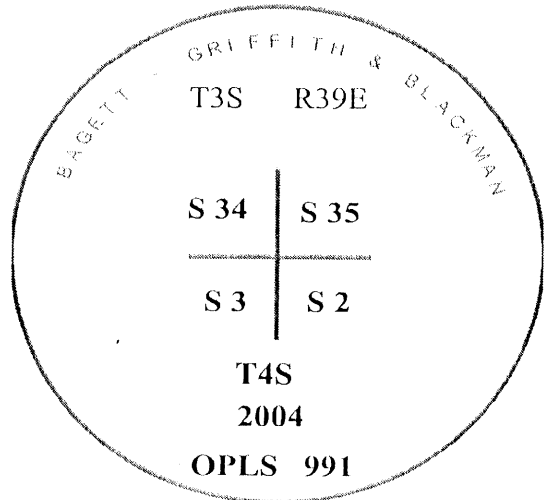

UNION COUNTY SURVEYOR

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. ROBINSON, DEPUTY

File Number 090-2004R

The bearing and distance to the iron pins was determined by a GPS observation using a Leica 500 base and receiver. The basis of bearing is that of survey number 024-2004.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201016

SECTION CORNER COMMON TO SECTION 34 AND 35, T 3 S AND SECTION 2 AND 3, T 4 S

TWP. 3/4 S. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: JULY 15, 2010

LAT: 45 ° 15 ' 11.94249 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 54 ' 42.01700 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 589123.960 INT FT.

E: 8868518.061 INT FT.

TYPE: GPS

THETA: 1 ° 50 ' 8.2 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9998956692

ELEV: 2698.36 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" aluminum cap on pipe set
6" below gravel road surface.

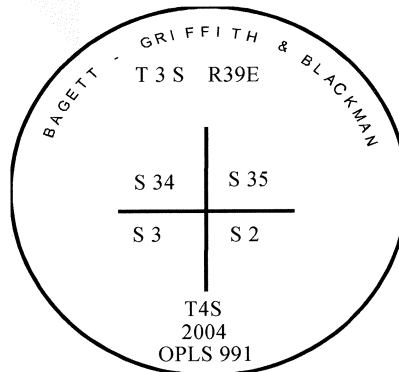

Renewal Date: December 31, 2010

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)