

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner originally established by Timothy W. Davenport contract No. 102, dated July 20, 1863. Surveyor general record states: Made mound of earth and drove charred stake as per instructions.

No subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of the original corner was found.

See Union County Survey Number 024-2004.

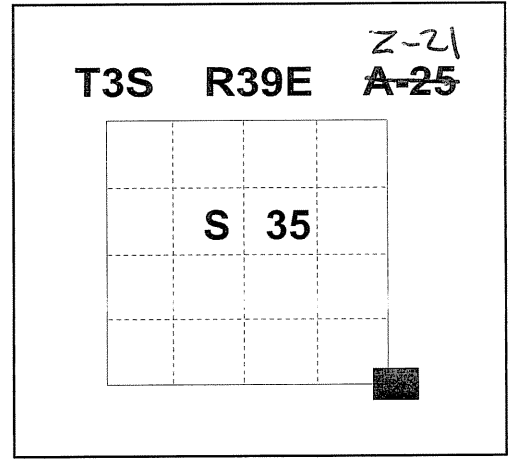

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER: A a point 30 feet South of a Railroad Rail fence corner:

I set a 2½"x30" aluminum pipe with 2½" aluminum cap in gravel road 6" below surface.

NEW BEARING OBJECTS:

A power pole with P.K. nail 1' foot above ground bears N 14° 30'E a distance of 134.60 feet

A power pole with P.K. nail 1' above ground bears S 34° 48'E a distance of 61.06 feet

A 5/8" x 30" rebar with 1½" aluminum cap bears S36° 05W, a distance of 42.98 feet, marked SW RP

A 2 ½"x4' pipe fence post set in concrete bears N 29° 20'W a distance of 60.96 feet


I hereby certify that the corner was monumented on August 5, 2004
Witness: Mike Spicer

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

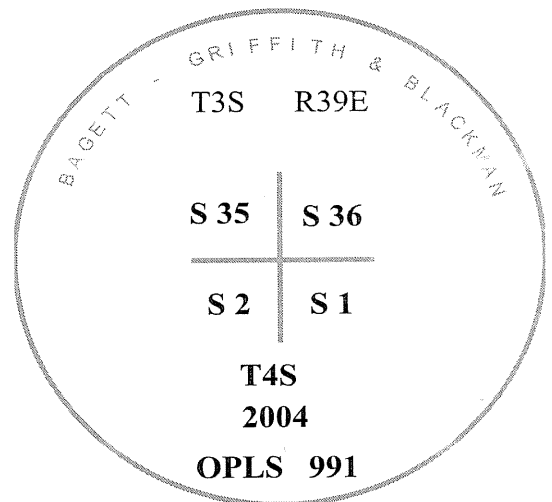

**UNION COUNTY
SURVEYOR**

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. Robinson, Deputy

File Number 024-2004R

The bearing and distance to the reference points was determined by GPS observation using a Leica 500 base and receiver. The basis of bearing is that of survey No. 024-2004

~~A-25~~
Z-21

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner originally established by Timothy W. Davenport contract No. 102, dated July 20, 1863. Surveyor general record states: Made mound of earth and drove charred stake as per instructions.

No subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of the original corner was found.

See Union County Survey Number 024-2004.

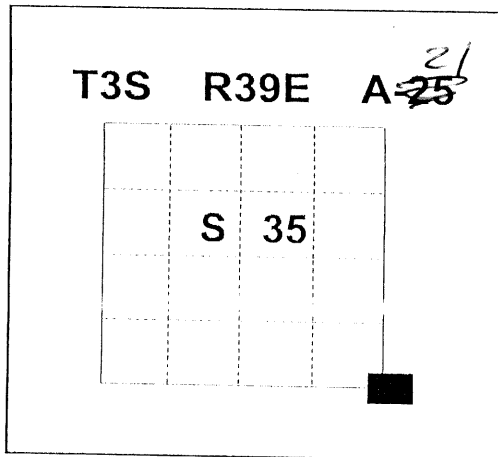

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER: A a point 30 feet South of a Railroad Rail fence corner:

I set a 2½"x30" aluminum pipe with 2½" aluminum cap in gravel road 6" below surface.

NEW BEARING OBJECTS:

A power pole with P.K. nail 1' foot above ground bears N 14° 30'E a distance of 134.60 feet

A power pole with P.K. nail 1' above ground bears S 34° 48'E a distance of 61.06 feet

A 5/8" x 30" rebar with 1½" aluminum cap bears S36° 05W, a distance of 42.98 feet, marked SW RP


A 2 ½"x4' pipe fence post set in concrete bears N 29° 20'W a distance of 60.96 feet

I hereby certify that the corner was monumented on August 5, 2004

Witness: Mike Spicer

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

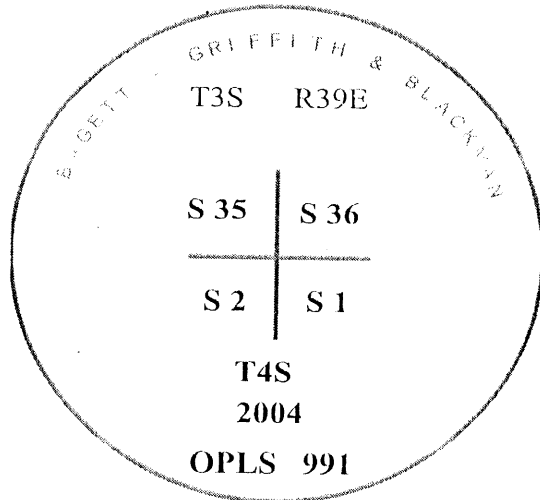

**UNION COUNTY
SURVEYOR**

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. Robinson, Deputy

File Number 087-2004-R

The bearing and distance to the reference points was determined by GPS observation using a Leica 500 base and receiver. The basis of bearing is that of survey No. 024-2004

A-~~25~~21

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201017

SECTION CORNER COMMON TO SECTION 35 AND 36, T 3 S AND SECTION 1 AND 2, T 4 S

TWP. 3/4 S. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: JULY 15, 2010

LAT: 45 ° 15 ' 12.05879 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 53 ' 28.02380 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 589305.946 INT FT.

E: 8873807.812 INT FT.

TYPE: GPS

THETA: 1 ° 51 ' 0.6 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9998956701

ELEV: 2699.67 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" aluminum cap on pipe set
6" below gravel road surface.

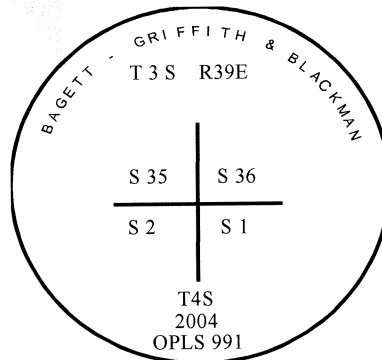

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2010

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)