

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David P. Thompson under GLO contract Number 103, dated 1863. Surveyor General record states:

Set post for 1/4 Sec corner in mound of earth, with charred stake, pits, trenches as per instructions

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of the original corner was found.

See Survey No. 032-1999

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey. I set a 2 1/2" diameter x 30" Aluminum monument marked as shown 34" in the ground marked as shown, from which:

NEW BEARING OBJECTS:



A 5/8" x 30" iron rebar with aluminum cap marked NE RP bears N40° E, a distance of 44.85 feet.

A 5/8" x 30" iron rebar with aluminum cap marked SE RP bears S49° E, a distance of 43.35 feet.


A 5/8" x 30" iron rebar with aluminum cap marked SW RP bears S39° W, a distance of 39.30 feet.

A 5/8" x 30" iron rebar with aluminum cap marked NW RP bears N30° W, a distance of 42.70 feet.

I hereby certify that the corner was monumented on June 15, 1999
 Witness: Gregory T. Blackman Jr and Norb Volny.

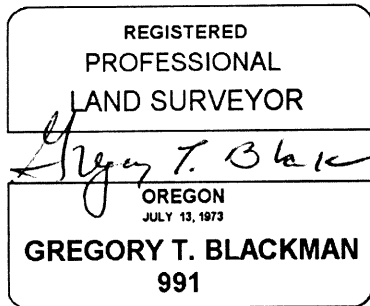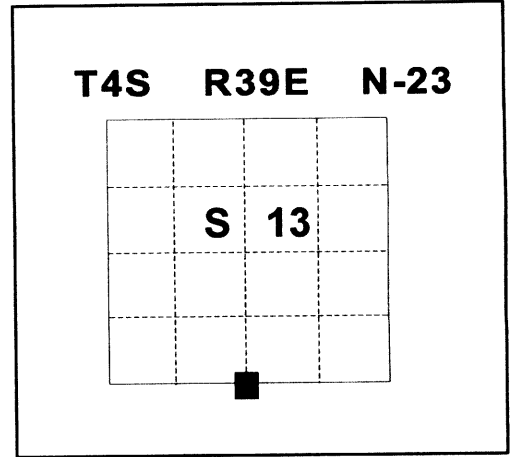

Renewal Date: December, 31 1999

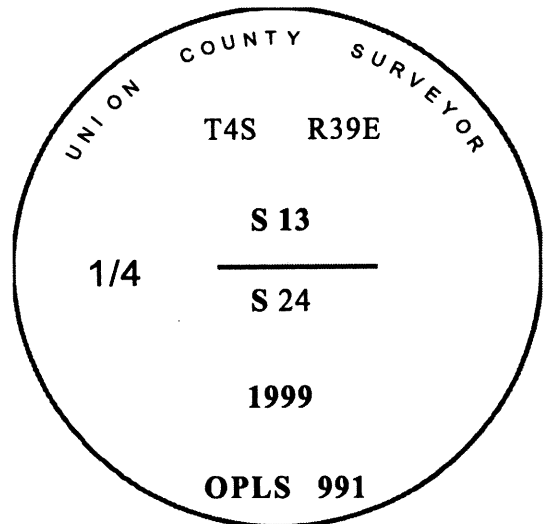

UNION COUNTY SURVEYOR

Date Received 9/13/99

Date Filed 10/8/99

Filed By R. ROBINSON, DEPUTY

File Number 044-1999R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17 1/2° East declination. The distances are to the center of each bearing object, unless otherwise noted above.

GEODETTIC CONTROL DATA

**OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON**

STA. NAME: 9930

QUARTER CORNER:
SEC 13
SEC.24 TWP.4 S. RGE.39 E
UNION COUNTY, OREGON
DATE TIED: JULY, 1999

GEODETTIC COOR: NAD 83(91)
LAT: 45:12'34.92880" N
LONG: 117:52'51.31868" W

SURVEYOR: WALTER L. CASWELL
PLS 737

SP. COOR: NAD 83(91)
N: 573486.243 INT.FT

FIRM: EAGLE GPS SURVEY CORP
6110 SW LOMBARD AVE.
BEAVERTON, OR. 97008-4736
(503) 643-1073

E: 8876947.797 INT.FT.
THETA: 1:51'26.688"

TYPE: GPS

SCALE FACTOR: 0.999894837

ORDER: SECOND CLASS: 1

ELEV: 2755.35 U.S.FT.

ELEV. DATUM: NGVD 1929(1947)

DIRECTIONS "TO REACH":

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Albert Hertel 10/14-99
OREGON
JULY 18, 1980
ALBERT HERTEL
1896

EXPIRES: 06/30/01
1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)