


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Timothy W. Davenport GLO contract number 102, dated July 20, 1863. Surveyor General record states:

Set post for Section corner in mound of stone, with charred stake, pits, trench as per instructions.

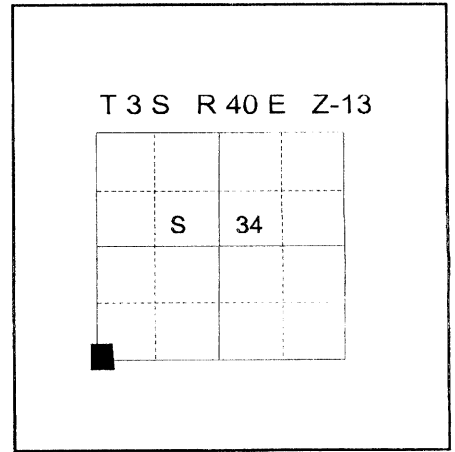

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found mound of stone harmonious with record position

See Survey Number 034-2001.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position of the found mound of stone, I set a 2 1/2" x 30" aluminum monument marked as shown below, 18" in the ground, from which:

**NEW BEARING OBJECTS:**

A 5/8" x 30" iron pin with aluminum cap marked BGB SURVEY MARKER S34 RP, bears North 9°East a distance of 10.48 feet.

A 5/8" x 30" iron pin with aluminum cap marked BGB SURVEY MARKER S3 RP, bears South 72°East a distance of 10.24 feet.

A 5/8" x 30" iron pin with aluminum cap marked BGB SURVEY MARKER S4 RP, bears South 77°West a distance of 17.22 feet.

A 5/8" x 30" iron pin with aluminum cap marked BGB SURVEY MARKER S33 RP, bears North 83°West a distance of 11.98 feet.

Raised mound of stone around monument, 3 ft. base to top of cap.

I hereby certify that the corner was monumented on October 8, 2001.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1988  
RICK G. ROBINSON  
2219

Renewal Date December 31, 2002

BAGETT - GRIFFITH & BLACKMAN

T 3 S R 40 E

S 33	S 34
S 4	S 3

T 4 S  
2001  
OPLS 2219

**UNION COUNTY  
SURVEYOR**

Date Received 10/23/01

Date Filed 10/23/01

Filed By *[Signature]*

File Number 042-2001R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 18° East. The distances are to the center of the aluminum caps.