


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by David T. Thompson under GLO contract number 103, dated September 3, 1883. Surveyor General record states:

Set post for corner to secs 7, 8, 17 & 18 in mound of stone. Corner remonumented by Union County Surveyor J.W. Kimbrell on survey number 35, done in 1888, recorded in the old book of surveys on page 64. His record states:

Set stone for cor to sec 7=8=17=18

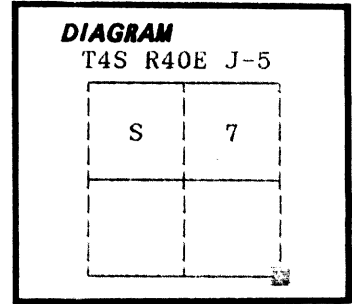

Survey number 14-71 by Harvey Barber, OPLS 679, did not find this stone and established the corner position 13 feet South of an existing fence corner using the GLO topographic calls.


Corner position was used by Gregory T. Blackman, OPLS 991, on survey number 31-87, but not monumented at that time.

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

NONE
Monumented corner position as per survey numbers 14-71 and 31-87.

Corner falls in a North-South fenceline 13 feet South of an existing fence corner with fences running West and South.

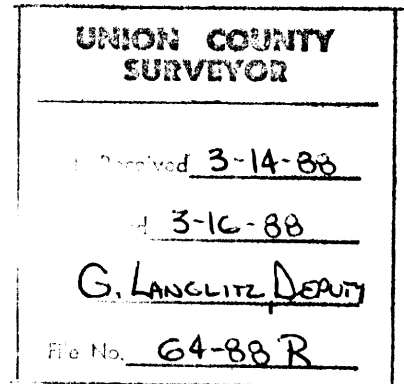

Description of monument and accessories I established to perpetuate the



original location of this corner: At the position established by survey number 14-71 and 31-87, determined by survey from the field notes of survey number 31-87, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 12 inches in the ground, to bedrock from which;

- A 9 ft. x 3 ft. exposed West rock face bears N51°E, 13.39 feet marked + B0
- A 9 ft. x 3 ft. x 15 inch high rock outcrop bears S41°E, 36.51 feet marked +B0 on West face
- A 5 ft. x 5 inch x 2 ft. high rock outcrop bears S17°W, 36.75 feet marked + B0 on West face
- A 10 ft. x 3½ ft. exposed rock face bears N43°W, 12.53 feet marked + B0 on Southeast corner


Raised mound of stone around monument, 4 ft. base to top of cap

I hereby certify that the above corner point was perpetuated as hereon described on March 11, 1988.

Witness: Rick Robinson

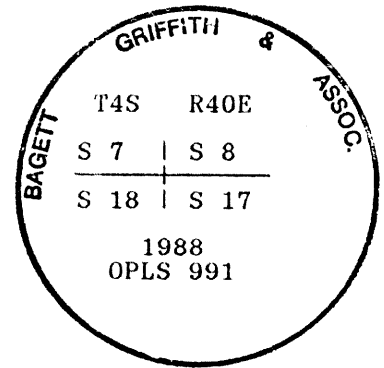

Gregory T. Blackman



I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to the + chiseled in the stone.

Office of..... County of.....
 State of..... I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

**HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200116

CORNER COMMON TO: 7,8,17,& 18

TWP. 4 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: 15 FEB. 2001

LAT: 45 ° 13 ' 27.09954 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 117 ° 51 ' 0.24116 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 579026.113 INT FT.

E: 8884721.955 INT FT.

TYPE: GPS

THETA: 1 ° 52 ' 45.4635726 "


ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9998950497

ELEV: 2916.78 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:



Renewal Date: Dec. 31, 2001

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)