


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by DAVID P. THOMPSON under GLO contract number 103, dated September 3, 1863.

Set post for 1/4 sec corner in mound of stone.

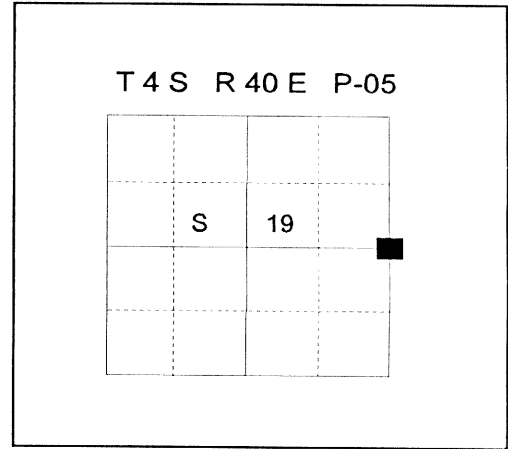

No record of subsequent monumentation found in UNION COUNTY survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found no evidence of the original corner monument. Accepted an existing fence corner with fences running South and West as the best available evidence of the original corner monument.

See Survey Number 004-1997.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

Along the East side of the fence corner post, I set a 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap marked as shown below, 24" in the ground.

**NEW BEARING OBJECTS:**


- A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears N 3°39'W, 16.70 feet marked UNION COUNTY SURVEYOR NORTH RP.
- A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S 89°54'E, 17.77 feet marked UNION COUNTY SURVEYOR EAST RP.
- A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S 4°17'W, 9.02 feet marked UNION COUNTY SURVEYOR SOUTH RP. (Set in N-S fence)
- A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears N 88°34'W, 13.37 feet marked UNION COUNTY SURVEYOR WEST RP. (Set in E-W fence)

I hereby certify that the corner was monumented on January 17, 1997.  
Witnesses: Rick Robinson and Greg Blackman Jr.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*  
OREGON  
JULY 13 1973  
GREGORY T. BLACKMAN  
991

Renewal Date: December, 31 1997

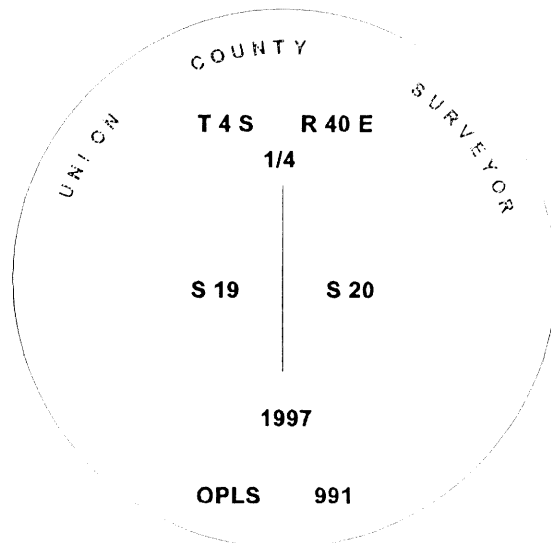

**UNION COUNTY SURVEYOR**

Date Received 1-29-97

Date Filed 1-29-97

Filed By R. ROBINSON, Denny

File Number 002-1997R

I used a total station instrument in the establishment of the new accessories. I used the same solar observation as survey number 004-1997 as the basis of bearing.

**HORIZONTAL CONTROL DATA  
UNION COUNTY, OREGON  
OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 200119

QUARTER COMMON TO: 19 & 20

TWP. 4 S. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: 15 FEB. 2001

LAT: 45 ° 12 ' 8.69323 " N

SURVEYOR: GREGORY T. BLACKMAN  
OPLS 991

LONG: 117 ° 51 ' 0.02535 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 571090.490 INT FT.

E: 8884997.795 INT FT.

TYPE: GPS

THETA: 1 ° 52 ' 45.6166235 "

ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9998947549

ELEV: 3073.74 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*  
OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

Renewal Date: Dec. 31, 2001

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)