

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by GLO Contract number 235 by John H. Stone dated July 6, 1875. GLO Record states:

Set stone 18x16x10 as per instructions for cor to Secs 36 and 25

Survey number 29-88 places the corner position by proportion, but did not set a monument.

No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original GLO Corner monument. See Survey Number 031-2000.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by survey number 031-2000, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown below, 29" in the ground, from which:

NEW BEARING TREES:

A 11" diameter Ponderosa Pine North 65° East, a distance of 53.22 feet marked T4S R41E S30 BT.


A 11" diameter Ponderosa Pine South 84° East, a distance of 78.30 feet marked T4S R41E S31 BT.

A 10" diameter Ponderosa Pine South 23° West, a distance of 181.75 feet marked T4S R40E S36 BT.)

A 8" diameter Ponderosa Pine North 39° West, a distance of 73.75 feet marked X BT.

Set a steel fence post approximately 1 feet North of the monument.

I hereby certify that the corner was perpetuated on October 5, 2000. Witnesses: Norbert Volny and Greg Blackman Jr.

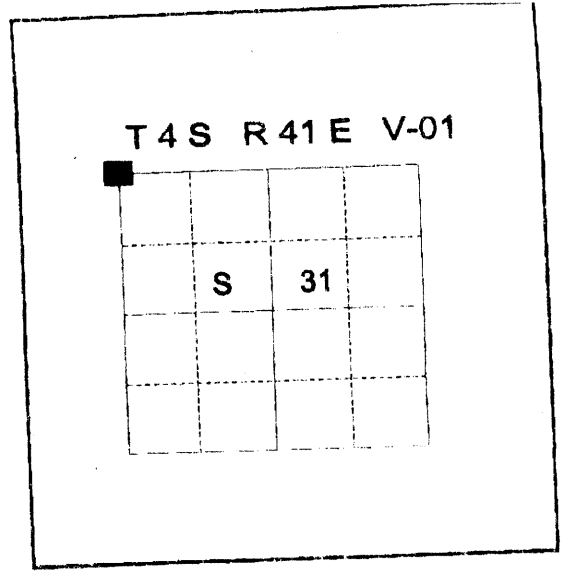


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 2000

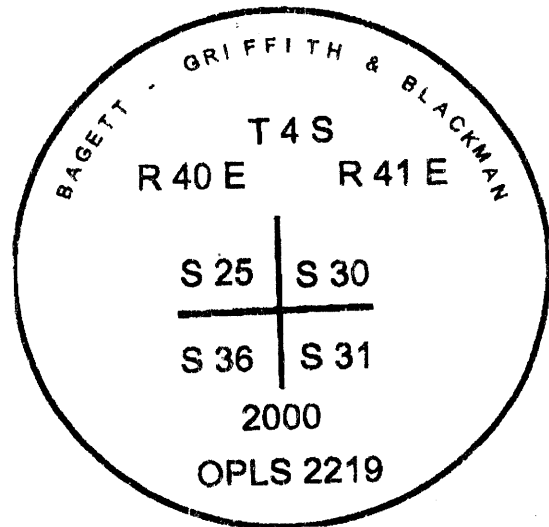

UNION COUNTY SURVEYOR

Date Received 10/10/2000

Date Filed 10/31/2000

Filed By *Greg T. Olson*

File Number 030-2001R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East magnetic declination. The distances to the Bts are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201026

SECTION CORNER COMMON TO SECTIONS 25,36,30 AND 31, RANGES 40 AND 41

TWP. 4 S. RGE. 40/41 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: OCTOBER 22, 2010

LAT: 45 ° 10 ' 48.03807 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 44 ' 52.40663 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 563806.894 INT FT.

E: 8911581.170 INT FT.

TYPE: GPS

THETA: 1 ° 57 ' 6.3 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.999894602

ELEV: 3931.66 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" aluminum pipe with aluminum cap marked as shown

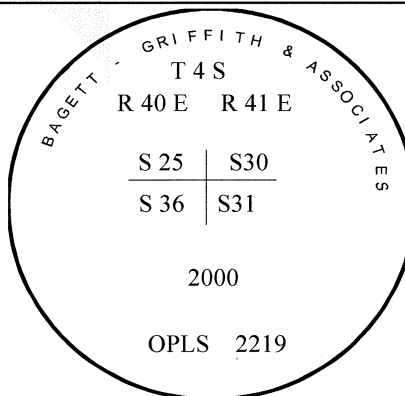

Renewal Date: December 31, 2010

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)