


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

K-13

History of original corner establishment:

No previous history

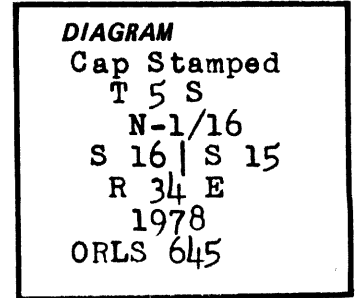

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2½" brass cap in a 30" galv. iron pipe, and stamped as shown above, in the ground, and placed a large mound of stone around the monument.

New bearing trees:

A pine 6" dia. bears N 60 E, 36.67 feet scribed 1/16S S 15 BT.
A pine 6" dia. bears S 45 W, 46.67 feet scribed 1/16S S 16 BT.

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Hambleton
8-21-78

OREGON JULY 10, 1999 JAMES H. HAMBLETON 645
--

I hereby certify the above corner monument was re-established as herein described in August 1978.

Witnesses:

Lionel E. Green
Crew Chief

L. D. Shubert
Instrument Man

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

OREGON COUNTY SURVEYOR
Received _____ ★ GPO—798-276
Filed _____
By _____
File No. <u>571-84 R</u>