


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

N-9

History of original corner establishment:

Corner was established in 1882 by Rufus S. Moore, under General Land Office Contract No. 451. Surveyor General's records state: Set a post 4 ft. long, 4" square, 24" in ground for corner to Sec.'s 16, 17, 20 & 21 marked T 5 S R 34 E S 16 on NE, T 5 S R 34 E S 17 on NW, S 20 on SW and S 21 on SE faces with 3 notches on the S and 4 notches on the E edges from which:

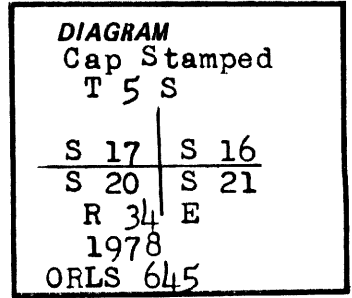

- A pine 42" dia. bears N 51 E, 141 lks. dist. marked T 5 S R 34 E S 16 BT.
- A pine 10" dia. bears N 60 W, 90 lks. dist. marked T 5 S R 34 E S 17 BT.
- A fir 9" dia. bears S 62 W, 87 lks. dist. marked T 5 S R 34 E S 20 BT.
- A pine 11" dia. bears S 14 E, 138 lks. dist. marked T 5 S R 34 E S 21 BT.

Description of corner evidence found:

At assumed corner location I found no trace of the wood post as described in the GLO record, though I did find a 1/2" iron pin at the corner location from which:

A pine 42" dia. bears N 51 E, 141 lks. dist. with the face being previously opened exposing the scribing; tree is alive and in good condition.

A pine approx. 30" dia. bears S 14 E, 138 lks. is dead and lying on the ground with a blaze healed over and being face down on the ground.

No evidence of the remaining 2 bearing trees in Sec's. 17 & 20.

Description of monument and accessories I established to perpetuate the original location of this corner:

As the evidence in the vicinity of the corner agrees with the GLO record, at the location of the 1/2" iron pin I set a 2 1/2" brass cap on a 30" galv. iron pipe, and being stamped as shown above, with a large mound of stone and dirt around, and of which buried the monument.

New bearing trees:

- A pine 18" dia. bears N 20 W, 154.54 feet scribed T 5 S R 34 E S 17 BT.
- A fir 9" dia. bears S 74 W, 126.03 feet scribed T 5 S R 34 E S 20 BT.
- A fir 10" dia. bears S 44 E, 94.50 feet scribed T 5 S R 34 E S 21 BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton
8-21-78.

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

I hereby certify the above corner monument was re-established as herein described in August 1978.

Witnesses: *Leonard C. Green*
Crew Chief

L. D. Shiley
Instrument Man

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR	
Date Received _____	☆ GPO—798-276
Date Filed _____	
By _____	
File No. <u>582-84R</u>	