


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. Q-24

History of original corner establishment:

None

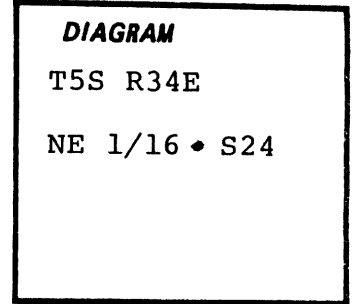

Description of corner evidence found:

No monument or evidence found.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2.5" aluminum cap on 2 3/8"x30" aluminum pipe rising 6" above ground. Cap is stamped: T5S R34E

Set steel fence posts 3.0 ft. west and 3.0 ft. south. NE 1/16 • S 24
RLS 1844
1984

New BT's:

A 5" L. Pine bears S51.5°W, 190.5 ft., blazed and scribed:
NE 1/16 S24 BT.


A 9" L. Pine bears S 17°E, 357.3 ft., blazed and scribed:
NE 1/16 S24 BT.

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. LS 1844 disc in lower end of blaze.

Compass Declination: 19 3/4°E Witness: Duane Scott

Corner is found in open meadow along Fly Creek about 200 ft. south of creek. Road 5160-544 runs on north side of creek.

I hereby certify the above described corner monument and/or accessories was established as described in June of 1984.

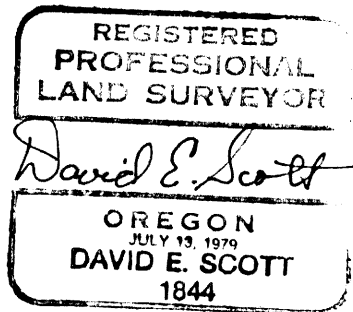

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR
Date Received <u>10-17-84</u>
Date Filed <u>10-24-84</u>
By <u>G. LANGRISH, DEPUTY</u>
File No. <u>954-84 R</u>