


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original subdivision of T5S, R34E was by Rufus S. Moore under Contract No. 451, approved Feb. 1, 1884. At this corner he found a post, from which an 8" Pine bears N55°E, 28 lks. and a 12" Pine bears N59°W, 59 lks. The township line between T5S and T6S had been surveyed by J. Cooper under Contract No. 397, approved April 5, 1882.

Index File No. Z-21

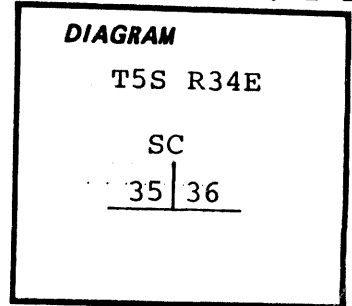

Description of corner evidence found:

No corner monument or other official accessories found.

Description of monument and accessories established to perpetuate the original location of this corner: Corner set by proportion. Cap is stamped:

Set 2.5" aluminum cap on 2 3/8" aluminum pipe rising 5" above ground. Set steel fence post 3.0 ft. north of corner.

SC	
T5S	R34E
S35	S36
RLS 1844	
1984	

New BT's:

- A 9" Tamarack bears N83°W, 55.4 Ft., blazed and scribed: SC T5S R34E S35 BT.
- A 6" L. Pine bears N38 1/4°E, 18.0 ft., blazed and scribed: SC T5S R34E S36 BT.


Brass LS 1844 disc in lower end of blazes. Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982.

Compass Declination: 19 3/4°E

Witness: Duane Scott

Corner is found

I hereby certify the above described corner monument and/or accessories was established as described July 10, 1984.

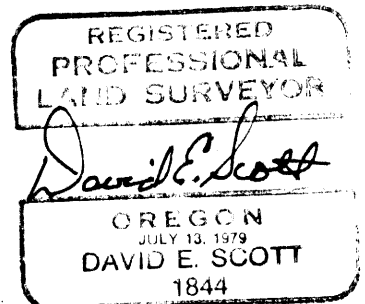

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

<b>UNION COUNTY SURVEYOR</b>	
Date Received	10-17-84
Date Filed	10-24-84
By	G. LANGLITZ, DEPUTY
File No.	988-84 R